

ZENIT



Zenit 25



Description

Recessed downlight with high visual comfort in 25W power, which makes it practical and versatile to illuminate tall spaces important and demanding.

Body and ring made of cast aluminum with high dissipation performance that provides excellent heat dissipation.

P44 degree of protection. Reflector made of gloss anodized aluminum and diffuser micropismatic.

70° opening optics with low glare level and symmetrical light distribution, which provides homogeneous lighting over the entire surface.

Led chip SMD brand BRIDGELUX with Color Rendering Index 90 (CRI) that is supplied in color temperatures of 3000K, 4000K and 2700K (7W).

LIFUD driver included with 0.95 power factor (PF).

Supply voltage 220-240V / 50-60Hz. False ceiling mounting, adaptable to all types of modular and plaster ceilings.

Ceiling cutout of Ø205 mm.

Temperatures



Aplicaciones

Designed for general lighting applications in all kinds of common areas, offices and commercial use due to its efficient consumption and visual comfort at great heights.

Finishes

○ White ● Black

* On request, the frame is supplied in any paint finish.

Version

* Optional dimmable DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC CASAMBI, BLUETOOTH AND ZIGBEE.

* Emergency Kit LHKIT2460



ZENIT 25

Reference	Consumption	Voltage	Temperature	Finish	Lumens		CRI	IP
ON-OFF								
LHDT2025BA27	25W	AC220-240V	2700K	White	2500	70°	90	44
LHDT2025BA30	25W	AC220-240V	3000K	White	2500	70°	90	44
LHDT2025BA40	25W	AC220-240V	4000K	White	2500	70°	90	44
LHDT2025NA27	25W	AC220-240V	2700K	Black	2500	70°	90	44
LHDT2025NA30	25W	AC220-240V	3000K	Black	2500	70°	90	44
LHDT2025NA40	25W	AC220-240V	4000K	Black	2500	70°	90	44

REGULATIONS

Reference	Consumption	Temperature	Reference	Consumption	Temperature
-----------	-------------	-------------	-----------	-------------	-------------

TRIAC

LHDT2025BA27T	25W	2700K
LHDT2025BA30T	25W	3000K
LHDT2025BA40T	25W	4000K
LHDT2025NA27T	25W	2700K
LHDT2025NA30T	25W	3000K
LHDT2025NA40T	25W	4000K

DAU

LHDT2025BA27D	25W	2700K
LHDT2025BA30D	25W	3000K
LHDT2025BA40D	25W	4000K
LHDT2025NA27D	25W	2700K
LHDT2025NA30D	25W	3000K
LHDT2025NA40D	25W	4000K

CASAMBI

LHDT2025BA27C	25W	2700K
LHDT2025BA30C	25W	3000K
LHDT2025BA40C	25W	4000K
LHDT2025NA27C	25W	2700K
LHDT2025NA30C	25W	3000K
LHDT2025NA40C	25W	4000K

EMERGENCY

LHDT2025BA27E	25W	2700K
LHDT2025BA30E	25W	3000K
LHDT2025BA40E	25W	4000K
LHDT2025NA27E	25W	2700K
LHDT2025NA30E	25W	3000K
LHDT2025NA40E	25W	4000K

ACCESSORIES

LHPTC181224	SIGNAL CONVERTER PICKUP TRIAC TO CASAMBI MAX. 150W
LHMBGATZBBL	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINARIES
LHMBGATZGET	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINARIES.
LHMBPTTRICACZG	PICKUP CONVERTER TRIAC - ZIGBEE 3.0 + PUSH MAX 150W.

0-10V

LHDT2025BA270	25W	2700K
LHDT2025BA300	25W	3000K
LHDT2025BA400	25W	4000K
LHDT2025NA270	25W	2700K
LHDT2025NA300	25W	3000K
LHDT2025NA400	25W	4000K


BLUETOOTH

LHDT2025BA27B	25W	2700K
LHDT2025BA30B	25W	3000K
LHDT2025BA40B	25W	4000K
LHDT2025NA27B	25W	2700K
LHDT2025NA30B	25W	3000K
LHDT2025NA40B	25W	4000K

ZIGBEE

LHDT2025BA27Z	25W	2700K
LHDT2025BA30Z	25W	3000K
LHDT2025BA40Z	25W	4000K
LHDT2025NA27Z	25W	2700K
LHDT2025NA30Z	25W	3000K
LHDT2025NA40Z	25W	4000K

Dimensions

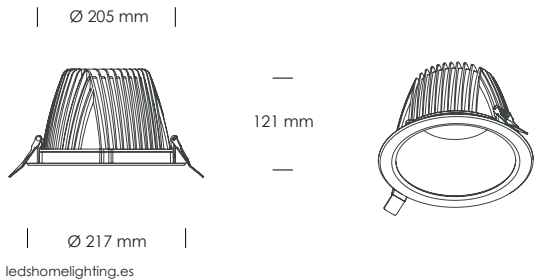

Luminous Flux

