

ZENIT



Zenit 40



Description

Recessed downlight with high visual comfort in 40W power, which makes it practical and versatile to illuminate tall spaces important and demanding.

Body and ring made of cast aluminum with high dissipation performance that provides excellent heat dissipation.

P44 degree of protection. Reflector made of gloss anodized aluminum and diffuser micropismatic.

70° opening optics with low glare level and symmetrical light distribution, which provides homogeneous lighting over the entire surface.

Led chip SMD brand BRIDGELUX with Color Rendering Index 90 (CRI) that is supplied in color temperatures of 3000K, 4000K and 2700K (7W).

LIFUD driver included with 0.95 power factor (PF).

Supply voltage 220-240V / 50-60Hz. False ceiling mounting, adaptable to all types of modular and plaster ceilings.

Ceiling cutout of Ø205 mm.

Temperatures



Aplicaciones

Designed for general lighting applications in all kinds of common areas, offices and commercial use due to its efficient consumption and visual comfort at great heights.

Finishes

○ White ● Black

* On request, the frame is supplied in any paint finish.

Version

* Optional dimmable DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC CASAMBI, BLUETOOTH AND ZIGBEE.

* Emergency Kit LHKIT2460



ZENIT 40

Reference	Consumption	Voltage	Temperature	Finish	Lumens		CRI	IP
ON-OFF								
LHDT2040BA27	40W	AC220-240V	2700K	White	3800	70°	90	44
LHDT2040BA30	40W	AC220-240V	3000K	White	3800	70°	90	44
LHDT2040BA40	40W	AC220-240V	4000K	White	3800	70°	90	44
LHDT2040NA27	40W	AC220-240V	2700K	Black	3800	70°	90	44
LHDT2040NA30	40W	AC220-240V	3000K	Black	3800	70°	90	44
LHDT2040NA40	40W	AC220-240V	4000K	Black	3800	70°	90	44

REGULATIONS

Reference	Consumption	Temperature	Reference	Consumption	Temperature
-----------	-------------	-------------	-----------	-------------	-------------

TRIAC

LHDT2040BA27T	40W	2700K
LHDT2040BA30T	40W	3000K
LHDT2040BA40T	40W	4000K
LHDT2040NA27T	40W	2700K
LHDT2040NA30T	40W	3000K
LHDT2040NA40T	40W	4000K

DAU

LHDT2040BA27D	40W	2700K
LHDT2040BA30D	40W	3000K
LHDT2040BA40D	40W	4000K
LHDT2040NA27D	40W	2700K
LHDT2040NA30D	40W	3000K
LHDT2040NA40D	40W	4000K

CASAMBI

LHDT2040BA27C	40W	2700K
LHDT2040BA30C	40W	3000K
LHDT2040BA40C	40W	4000K
LHDT2040NA27C	40W	2700K
LHDT2040NA30C	40W	3000K
LHDT2040NA40C	40W	4000K

EMERGENCY

LHDT2040BA27E	40W	2700K
LHDT2040BA30E	40W	3000K
LHDT2040BA40E	40W	4000K
LHDT2040NA27E	40W	2700K
LHDT2040NA30E	40W	3000K
LHDT2040NA40E	40W	4000K

ACCESSORIES

LHPTC181224	SIGNAL CONVERTER PICKUP TRIAC TO CASAMBI MAX. 150W
LHMBGATZBBL	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINARIES
LHMBGATZGET	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINARIES.
LHMBPTTRIACZG	PICKUP CONVERTER TRIAC - ZIGBEE 3.0 + PUSH MAX 150W.

O-10V

LHDT2040BA27O	40W	2700K
LHDT2040BA30O	40W	3000K
LHDT2040BA40O	40W	4000K
LHDT2040NA27O	40W	2700K
LHDT2040NA30O	40W	3000K
LHDT2040NA40O	40W	4000K


BLUETOOTH

LHDT2040BA27B	40W	2700K
LHDT2040BA30B	40W	3000K
LHDT2040BA40B	40W	4000K
LHDT2040NA27B	40W	2700K
LHDT2040NA30B	40W	3000K
LHDT2040NA40B	40W	4000K

ZIGBEE

LHDT2040BA27Z	40W	2700K
LHDT2040BA30Z	40W	3000K
LHDT2040BA40Z	40W	4000K
LHDT2040NA27Z	40W	2700K
LHDT2040NA30Z	40W	3000K
LHDT2040NA40Z	40W	4000K

Dimensions

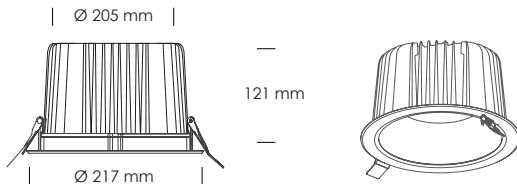

Luminous Flux

