

ZENIT II



Zenit II 20



Description

Recessed downlight with high visual comfort in 20W power, which makes it practical and versatile to illuminate spaces with important and demanding heights.

Body and ring made of cast aluminum with high dissipation performance that provides excellent heat dissipation.

IP44 degree of protection. Reflector made of white finished aluminum and opal PMMA diffuser.

70° opening optics with low glare level and symmetrical light distribution, which provides homogeneous lighting over the entire surface.

Led chip SMD brand BRIDGELUX with Color Rendering Index 90 (CRI) that is supplied in color temperatures of 3000K, 4000K and 2700K (7w).

LIFUD driver included with 0.95 power factor (PF).

Supply voltage 220-240V / 50-60Hz.

False ceiling mounting, adaptable to all types of modular and plaster ceilings.

Ceiling cutout of Ø170.

Temperatures



Applications

Designed for general lighting applications in all kinds of common areas, offices and commercial use due to its efficient consumption and visual comfort at great heights.

Finishes

○ White

* On demand it is supplied in any paint finish.

Version

* Optional dimmable DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC CASAMBI, BLUETOOTH AND ZIGBEE.

* Emergency Kit LHKIT2460



ZENIT II 20

Reference	Consumption	Voltage	Temperature	Finish	Lumens		CRI	IP
ON-OFF								
LHDT2020BB27	20W	AC220-240V	2700K	White	2150	70°	90	44
LHDT2020BB30	20W	AC220-240V	3000K	White	2150	70°	90	44
LHDT2020BB40	20W	AC220-240V	4000K	White	2150	70°	90	44
LHDT2020NN27	20W	AC220-240V	2700K	Black	2150	70°	90	44
LHDT2020NN30	20W	AC220-240V	3000K	Black	2150	70°	90	44
LHDT2020NN40	20W	AC220-240V	4000K	Black	2150	70°	90	44

REGULATIONS

Reference	Consumption	Temperature	Reference	Consumption	Temperature
-----------	-------------	-------------	-----------	-------------	-------------

TRIAC

LHDT2020BB27T	20W	2700K
LHDT2020BB30T	20W	3000K
LHDT2020BB40T	20W	4000K
LHDT2020NN27T	20W	2700K
LHDT2020NN30T	20W	3000K
LHDT2020NN40T	20W	4000K

DALI

LHDT2020BB27D	20W	2700K
LHDT2020BB30D	20W	3000K
LHDT2020BB40D	20W	4000K
LHDT2020BB27D	20W	2700K
LHDT2020NN30D	20W	3000K
LHDT2020NN40D	20W	4000K

CASAMBI

LHDT2020BB27C	20W	2700K
LHDT2020BB30C	20W	3000K
LHDT2020BB40C	20W	4000K
LHDT2020NN27C	20W	2700K
LHDT2020NN30C	20W	3000K
LHDT2020NN40C	20W	4000K

EMERGENCY

LHDT2020BB27E	20W	2700K
LHDT2020BB30E	20W	3000K
LHDT2020BB40E	20W	4000K
LHDT2020NN27E	20W	2700K
LHDT2020NN30E	20W	3000K
LHDT2020NN40E	20W	4000K

ACCESSORIES

LHPTC181224	SIGNAL CONVERTER PICKUP TRIAC TO CASAMBI MAX. 150W
LHMBGATZBBL	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINARIES
LHMBGATZGET	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINARIES.
LHMBPTRIAC2G	PICKUP CONVERTER TRIAC - ZIGBEE 3.0 + PUSH MAX 150W.

O-10V

LHDT2020BB27O	20W	2700K
LHDT2020BB30O	20W	3000K
LHDT2020BB40O	20W	4000K
LHDT2020NN27O	20W	2700K
LHDT2020NN30O	20W	3000K
LHDT2020NN40O	20W	4000K


BLUETOOTH

LHDT2020BB27B	20W	2700K
LHDT2020BB30B	20W	3000K
LHDT2020BB40B	20W	4000K
LHDT2020NN27B	20W	2700K
LHDT2020NN30B	20W	3000K
LHDT2020NN40B	20W	4000K

ZIGBEE

LHDT2020BB27Z	20W	2700K
LHDT2020BB30Z	20W	3000K
LHDT2020BB40Z	20W	4000K
LHDT2020NN27Z	20W	2700K
LHDT2020NN30Z	20W	3000K
LHDT2020NN40Z	20W	4000K

Dimensions

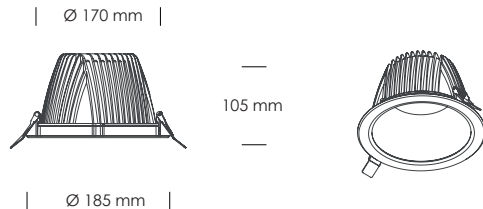

Luminous Flux

