

ZENIT II



Zenit II 40



Description

Recessed downlight with high visual comfort in 40W power, which makes it practical and versatile to illuminate spaces with important and demanding heights.

Body and ring made of cast aluminum with high dissipation performance that provides excellent heat dissipation.

IP44 degree of protection. Reflector made of white finished aluminum and opal PMMA diffuser.

70° opening optics with low glare level and symmetrical light distribution, which provides homogeneous lighting over the entire surface.

Led chip SMD brand BRIDGELUX with Color Rendering Index 90 (CRI) that is supplied in color temperatures of 3000K, 4000K and 2700K (7w).

LIFUD driver included with 0.95 power factor (PF).

Supply voltage 220-240V / 50-60Hz.

False ceiling mounting, adaptable to all types of modular and plaster ceilings.

Ceiling cutout of Ø205 mm.

Temperatures



Applications

Designed for general lighting applications in all kinds of common areas, offices and commercial use due to its efficient consumption and visual comfort at great heights.

Finishes

○ White

* On demand it is supplied in any paint finish.

Version

* Optional dimmable DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC CASAMBI, BLUETOOTH AND ZIGBEE.

* Emergency Kit LHKIT2460



ZENIT II 40

Reference	Consumption	Voltage	Temperature	Finish	Lumens		CRI	IP
ON-OFF								
LHDT2040BB27	40W	AC220-240V	2700K	White	3800	70°	90	44
LHDT2040BB30	40W	AC220-240V	3000K	White	3800	70°	90	44
LHDT2040BB40	40W	AC220-240V	4000K	White	3800	70°	90	44
LHDT2040NN27	40W	AC220-240V	2700K	Black	3800	70°	90	44
LHDT2040NN30	40W	AC220-240V	3000K	Black	3800	70°	90	44
LHDT2040NN40	40W	AC220-240V	4000K	Black	3800	70°	90	44

REGULATIONS

Reference	Consumption	Temperature	Reference	Consumption	Temperature
TRIAC					
LHDT2040BB27T	40W	2700K	LHDT2040BB27O	40W	2700K
LHDT2040BB30T	40W	3000K	LHDT2040BB30O	40W	3000K
LHDT2040BB40T	40W	4000K	LHDT2040BB40O	40W	4000K
LHDT2040NN27T	40W	2700K	LHDT2040NN27O	40W	2700K
LHDT2040NN30T	40W	3000K	LHDT2040NN30O	40W	3000K
LHDT2040NN40T	40W	4000K	LHDT2040NN40O	40W	4000K

DALI

LHDT2040BB27D	40W	2700K	LHDT2040BB27B	40W	2700K
LHDT2040BB30D	40W	3000K	LHDT2040BB30B	40W	3000K
LHDT2040BB40D	40W	4000K	LHDT2040BB40B	40W	4000K
LHDT2040NN27D	40W	2700K	LHDT2040NN27B	40W	2700K
LHDT2040NN30D	40W	3000K	LHDT2040NN30B	40W	3000K
LHDT2040NN40D	40W	4000K	LHDT2040NN40B	40W	4000K

CASAMBI

LHDT2040BB27C	40W	2700K	LHDT2040BB27Z	40W	2700K
LHDT2040BB30C	40W	3000K	LHDT2040BB30Z	40W	3000K
LHDT2040BB40C	40W	4000K	LHDT2040BB40Z	40W	4000K
LHDT2040BB27C	40W	2700K	LHDT2040BB27Z	40W	2700K
LHDT2040BB30C	40W	3000K	LHDT2040BB30Z	40W	3000K
LHDT2040BB40C	40W	4000K	LHDT2040BB40Z	40W	4000K


EMERGENCY

LHDT2040BB27E	40W	2700K			
LHDT2040BB30E	40W	3000K			
LHDT2040BB40E	40W	4000K			
LHDT2040NN27E	40W	2700K			
LHDT2040NN30E	40W	3000K			
LHDT2040NN40E	40W	4000K			

ACCESSORIES

LHPTC181224	SIGNAL CONVERTER PICKUP TRIAC TO CASAMBI MAX. 150W
LHMBGATZ8BL	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINARIES
LHMBGATZGET	GATEWAY MULTICONTROLLER ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINARIES.
LHMBPTTRIAZCG	PICKUP CONVERTER TRIAC - ZIGBEE 3.0 + PUSH MAX 150W.

Dimensions

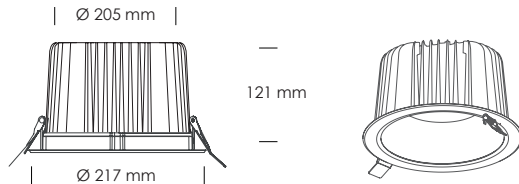

ledshomelighting.es

Luminous Flux

