

ASTRO WALL WASHER



Description

Recessed linear downlight in its wallwasher version in 30W power with a small longitudinal design.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Inner effector manufactured in glossy aluminum plus an asymmetrical polycarbonate outer reflector available in gloss black, gloss white and opal diffuser finish.

70° aperture lens with UGR<19 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

OSRAM brand SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperature of 3000K.

Driver included with power factor 0.95(PF).

Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Temperature



Usage

Designed to illuminate vertical surfaces for general and accent lighting applications and that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

● White - Black ● Black - Black

○ White - White

Versions

*Optional adjustment DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.



ASTRO WALL WASHER 30

Reference	Consumption	Voltage	Temperature	Color	Lumens	△ _a	CRI	IP
ON-OFF								
LHBA730BN27	30W	AC220-240V	2700K	White-Black	1240	70°	90	20
LHBA730BN30	30W	AC220-240V	3000K	White-Black	1240	70°	90	20
LHBA730BN40	30W	AC220-240V	4000K	White-Black	1240	70°	90	20
LHBA730BB27	30W	AC220-240V	2700K	White-White	1240	70°	90	20
LHBA730BB30	30W	AC220-240V	3000K	White-White	1240	70°	90	20
LHBA730BB40	30W	AC220-240V	4000K	White-White	1240	70°	90	20
LHBA730NN27	30W	AC220-240V	2700K	Black-Black	1240	70°	90	20
LHBA730NN30	30W	AC220-240V	3000K	Black-Black	1240	70°	90	20
LHBA730NN40	30W	AC220-240V	4000K	Black-Black	1240	70°	90	20

REGULATIONS

Reference	Temperature	Color
TRIAC		
LHBA730BN27T-40T	2700K-4000K	White-Black
LHBA730BN30T	3000K	White-Black
LHBA730BB27T-40T	2700K-4000K	White-White
LHBA730BB30T	3000K	White-White
LHBA730NN27T-40T	2700K-4000K	Black-Black
LHBA730NN30T	3000K	Black-Black

DALI

LHBA730BN27D-40D	2700K-4000K	White-Black
LHBA730BN30D	3000K	White-Black
LHBA730BB27D-40D	2700K-4000K	White-White
LHBA730BB30D	3000K	White-White
LHBA730NN27D-40D	2700K-4000K	Black-Black
LHBA730NN30D	3000K	Black-Black

BLUETOOTH

LHBA730BN27B-40B	2700K-4000K	White-Black
LHBA730BN30B	3000K	White-Black
LHBA730BB27B-40B	2700K-4000K	White-White
LHBA730BB30B	3000K	White-White
LHBA730NN27B-40B	2700K-4000K	Black-Black
LHBA730NN30B	3000K	Black-Black

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Reference	Temperature	Color
0-10v		
LHBA730BN270-400	2700K-4000K	White-Black
LHBA730BN300	3000K	White-Black
LHBA730BB270-400	2700K-4000K	White-White
LHBA730BB300	3000K	White-White
LHBA730NN270-400	2700K-4000K	Black-Black
LHBA730NN300	3000K	Black-Black


CASAMBI

LHBA730BN27C-40C	2700K-4000K	White-Black
LHBA730BN30C	3000K	White-Black
LHBA730BB27C-40C	2700K-4000K	White-White
LHBA730BB30C	3000K	White-White
LHBA730NN27C-400	2700K-4000K	Black-Black
LHBA730NN30C	3000K	Black-Black

ZIGBEE

LHBA730BN27Z-40Z	2700K-4000K	White-Black
LHBA730BN30Z	3000K	White-Black
LHBA730BB27Z-40Z	2700K-4000K	White-White
LHBA730BB30Z	3000K	White-White
LHBA730NN27Z-40Z	2700K-4000K	Black-Black
LHBA730NN30Z	3000K	Black-Black

Dimensions

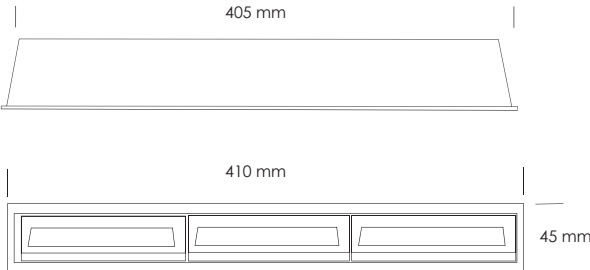

Luminous Flow

