

MAGNET 48V



MAGNET is a minimalist lighting system, both versatile and multi-purpose which provides multiple lighting solutions for offices, hotels, restaurants and also for all types of domestic and commercial environments.

Versions


- * optional adjustable BLUETOOTH.
- * optional DALI regulation.

The basis of the system are the 48v magnetic rails, which in its different versions; surface, recessed and suspended along with its various accessories, allows us to perform all kinds of desired lighting combinations such as illuminating in straight lines and/or via angles and integrating the light continuously and simultaneously along both the wall and the ceiling.

Color

- Black
- White



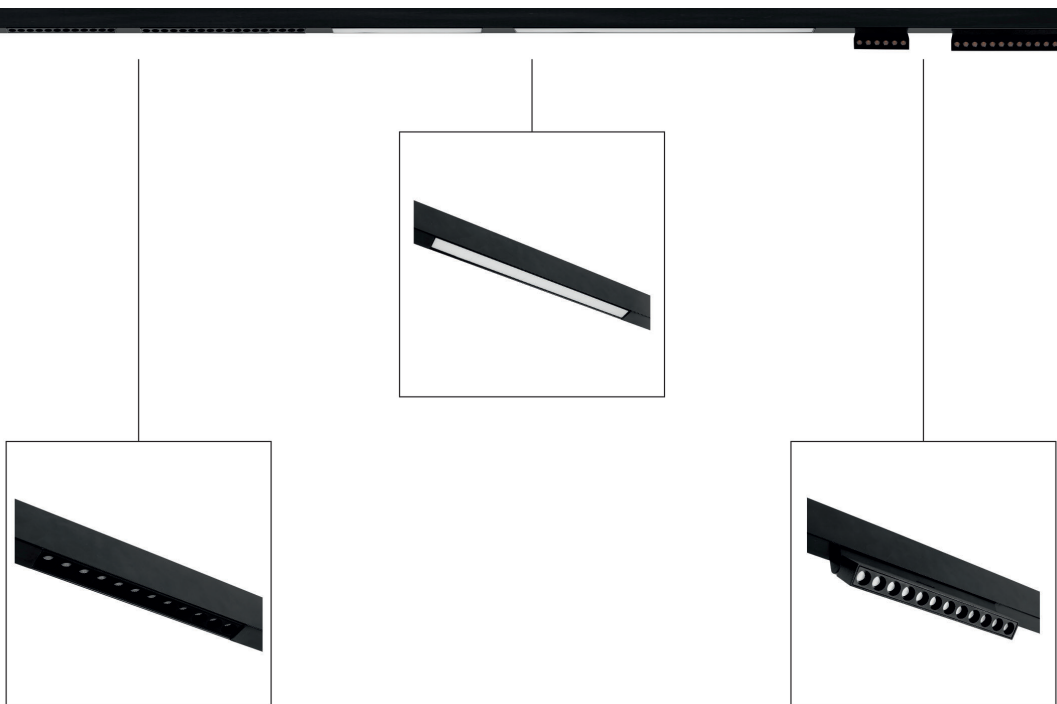

The luminaires adapt to the track simply by way of magnetization and without the use of tools for installation. This allows us to add and remove luminaires depending on the lighting needs, providing different possibilities for all types of ambient, decorative or accent lighting scenarios.

Special temperature



Available in up to four track installation options:

Conventional surface track

XS surface track

Conventional narrow and exposed flange recessed track

TRIMLESS recessed track



CAPRI MAGNET

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHPCM155N27	5W	DC48V	2700K	Black	406	36°	90	20
LHPCM155B27	5W	DC48V	2700K	White	406	36°	90	20
LHPCM155N30	5W	DC48V	3000K	Black	406	36°	90	20
LHPCM155B30	5W	DC48V	3000K	White	406	36°	90	20
LHPCM158N27	8W	DC48V	3000K	Black	650	36°	90	20
LHPCM158B27	8W	DC48V	3000K	White	650	36°	90	20
LHPCM158N30	8W	DC48V	3000K	Black	650	36°	90	20
LHPCM158B30	8W	DC48V	3000K	White	650	36°	90	20
LHPCM1512N27	12W	DC48V	2700K	Black	1050	36°	90	20
LHPCM1512B27	12W	DC48V	2700K	White	1050	36°	90	20
LHPCM1512N30	12W	DC48V	3000K	Black	1050	36°	90	20
LHPCM1512B30	12W	DC48V	3000K	White	1050	36°	90	20
LHPCM1520N27	20W	DC48V	2700K	Black	1850	36°	90	20
LHPCM1520B27	20W	DC48V	2700K	White	1850	36°	90	20
LHPCM1520N30	20W	DC48V	3000K	Black	1850	36°	90	20
LHPCM1520B30	20W	DC48V	3000K	White	1850	36°	90	20
LHPCM1530N27	30W	DC48V	2700K	Black	2775	36°	90	20
LHPCM1530B27	30W	DC48V	2700K	White	2775	36°	90	20
LHPCM1530N30	30W	DC48V	3000K	Black	2775	36°	90	20
LHPCM1530B30	30W	DC48V	3000K	White	2775	36°	90	20

BLUETOOTH - CCT

LHPCM155NTNTB	5W	DC48V	2700K ~ 6000K	Black	406	36°	90	20
LHPCM155BTNTB	5W	DC48V	2700K ~ 6000K	White	406	36°	90	20
LHPCM158NTNTB	8W	DC48V	2700K ~ 6000K	Black	650	36°	90	20
LHPCM158BTNTB	8W	DC48V	2700K ~ 6000K	White	650	36°	90	20
LHPCM1512NTNTB	12W	DC48V	2700K ~ 6000K	Black	1050	36°	90	20
LHPCM1512BTNTB	12W	DC48V	2700K ~ 6000K	White	1050	36°	90	20
LHPCM1520NTNTB	20W	DC48V	2700K ~ 6000K	Black	1850	36°	90	20
LHPCM1520BTNTB	20W	DC48V	2700K ~ 6000K	White	1850	36°	90	20
LHPCM1530NTNTB	30W	DC48V	2700K ~ 6000K	Black	2775	36°	90	20
LHPCM1530BTNTB	30W	DC48V	2700K ~ 6000K	White	2775	36°	90	20

ACCESSORIES

LHPCM155R15	15 DEGREE	OPTIC	CAPRI	5W	3,00€	LHPCM1512R15	15 DEGREE	OPTIC	CAPRI	12W
LHPCM155R24	24 DEGREE	OPTIC	CAPRI	5W	3,00€	LHPCM1512R24	24 DEGREE	OPTIC	CAPRI	12W
LHPCM155R50	50 DEGREE	OPTIC	CAPRI	5W	3,00€	LHPCM1512R50	50 DEGREE	OPTIC	CAPRI	12W
LHPCM158R15	15 DEGREE	OPTIC	CAPRI	8W	3,00€	LHPCM1512R15	15 DEGREE	OPTIC	CAPRI	12W
LHPCM158R24	24 DEGREE	OPTIC	CAPRI	8W	3,00€	LHPCM1512R24	24 DEGREE	OPTIC	CAPRI	12W
LHPCM158R50	50 DEGREE	OPTIC	CAPRI	8W	3,00€	LHPCM1512R50	50 DEGREE	OPTIC	CAPRI	12W

*Luminaire compatible with TRACKS MAGNET XS DC48V SURFACE.

*Optional chip COB CRI95 in 2200K - 2700K - 3500K - 4000K - 5000K - 6000K add P.V.P: 14,00€

