

COSMOS



Description

Recessed downlight with a high level of visual comfort with 7W power, consisting of independent optical modules.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Reflector made of polycarbonate in polished chrome finish..

35x70° aperture optics with low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

CREE brand SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperatures of 3200K and 4000K.

Driver included with power factor 0.90(PF).

Voltage supply 230V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Temperature

3000K

4000K

Usage

Designed for general lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

☐ White ☒ Black

Versions

*Optional adjustment DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.

*Emergency Kit LHKIT2460 see information page 415.



COSMOS 7

Reference	Consumption	Voltage	Temperature	Color	Lumens	Δ	CRI	IP
ON-OFF								
LHDT67B30	7W	AC220-240V	3000K	White	705	35x70°	90	20
LHDT67B40	7W	AC220-240V	4000K	White	705	35x70°	90	20
LHDT67N30	7W	AC220-240V	3000K	Black	705	35x70°	90	20
LHDT67N40	7W	AC220-240V	4000K	Black	705	35x70°	90	20


REGULATIONS

Reference	Temperature	Color	Reference	Temperature	Color
TRIAC					
LHDT67B30T	3000K	White	LHDT67B300	3000K	White
LHDT67B40T	4000K	White	LHDT67B400	4000K	White
LHDT67N30T	3000K	Black	LHDT67N300	3000K	Black
LHDT67N40T	4000K	Black	LHDT67N400	4000K	Black
DALI					
LHDT67B30D	3000K	White	LHDT67B30C	3000K	White
LHDT67B40D	4000K	White	LHDT67B40C	4000K	White
LHDT67N30D	3000K	Black	LHDT67N30C	3000K	Black
LHDT67N40D	4000K	Black	LHDT67N40C	4000K	Black
BLUETOOTH					
LHDT6730B	3000K	White	LHDT67B30Z	3000K	White
LHDT67B40B	4000K	White	LHDT67B40Z	4000K	White
LHDT67N30B	3000K	Black	LHDT67N30Z	3000K	Black
LHDT67N40B	4000K	Black	LHDT67N40Z	4000K	Black
EMERGENCY					
LHDT6730E	3000K	White			
LHDT67B40E	4000K	White			
LHDT67N30E	3000K	Black			
LHDT67N40E	4000K	Black			

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

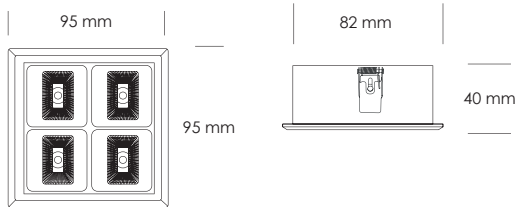

Luminous Flow

