

ONYX LINEAL



Description

Recessed, linear downlight with a high level of visual comfort formed by individual 20W optical modules with a super-small longitudinal design.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Reflector made of polycarbonate and different decorative finishes guaranteeing minimum glare.

38° aperture lens with UGR<12 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperatures of 2700K, 3200K and 4000K.

Driver included with power factor 0.90(PF).

Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Temperature



Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

Black - White

White - Black

White - White

Transparente

Black - Black

White - Gold

Black - Gold

Versions

* Optional adjustment, Dali, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.



ONYX 20 LINEAL

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHOL120BCCT	20W	AC220-240V	2700K ~3200K~ 4000K	White	1510	38°	90	20
LHOL120NCCT	20W	AC220-240V	2700K ~3200K~ 4000K	Black	1510	38°	90	20

REGULATIONS

TRIAC		
Reference	Temperature	Color
LHOL120BCCTT	2700K ~3200K~ 4000K	White
LHOL120NCCTT	2700K ~3200K~ 4000K	Black

DALI		
Reference	Temperature	Color
LHOL120BCCTD	2700K ~3200K~ 4000K	White
LHOL120NCCTD	2700K ~3200K~ 4000K	Black

BLUETOOTH		
Reference	Temperature	Color
LHOL120BCCTB	2700K ~3200K~ 4000K	White
LHOL120NCCTB	2700K ~3200K~ 4000K	Black

ZIGBEE		
Reference	Temperature	Color
LHOL120BCCTZ	2700K ~3200K~ 4000K	White
LHOL120NCCTZ	2700K ~3200K~ 4000K	Black

CASAMBI		
Reference	Temperature	Color
LHOL120BCCTC	2700K ~3200K~ 4000K	White
LHOL120NCCTC	2700K ~3200K~ 4000K	Black

0-10V		
Reference	Temperature	Color
LHOL120BCCT0	2700K ~3200K~ 4000K	White
LHOL120NCCT0	2700K ~3200K~ 4000K	Black

DALI + CCT		
Reference	Temperature	Color
LHOL120BCCTTND	2700K ~3200K~ 4000K	White
LHOL120NCCTTND	2700K ~3200K~ 4000K	Black

BLUETOOTH + CCT		
Reference	Temperature	Color
LHOL120BCCTTNB	2700K ~3200K~ 4000K	White
LHOL120NCCTTNB	2700K ~3200K~ 4000K	Black


ZIGBEE + CCT		
Reference	Temperature	Color
LHOL120BCCTTNZ	2700K ~3200K~ 4000K	White
LHOL120NCCTTNZ	2700K ~3200K~ 4000K	Black

CASAMBI + CCT		
Reference	Temperature	Color
LHOL120BCCTTNC	2700K ~3200K~ 4000K	White
LHOL120NCCTTNC	2700K ~3200K~ 4000K	Black

ACCESSORIES

LHROLR120BB	Reflector round onyx linear 12 points	White - White
LHROLR120BN	Reflector round onyx linear 12 points	White - Black
LHROLR120BO	Reflector round onyx linear 12 points	White - Gold
LHROLR120NN	Reflector round onyx linear 12 points	Black - black
LHROLR120NO	Reflector round onyx linear 12 points	Black - Gold
LHROL120B	Reflector square onyx linear 12 points	White
LHROL120N	Reflector square onyx linear 12 points	Black
LHROL120T	Reflector square onyx linear 12 points	Transparent

Dimensions

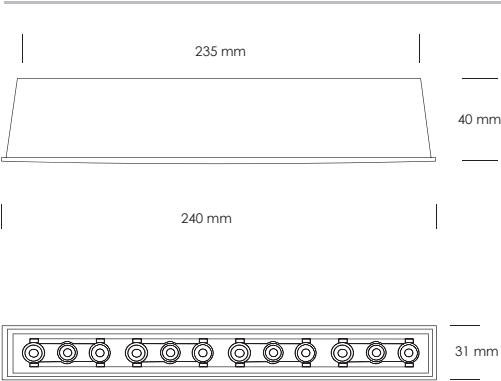

Luminous Flow

