



LINK WALL WASHER



LINK WALL WASHER allows a uniform illumination of all types of surface areas. Ideally it should be mounted on the wall at a distance of one third of the height of the room.



To achieve a good and uniform horizontal illumination, the spacing between luminaires should be between 0.5 m - 1.0 m, with a measurement 0.8 m being ideal depending on luminaire performance and washout.



Description

Recessed downlight with a high level of visual comfort with 15W power.

Compact design with the possibility of interchanging the various frames according to the needs of the space to be illuminated.

Body and frame made of cast aluminium, with high dissipation performance and provides excellent heat evacuation.

IP20 protection grade.

Lens with asymmetrical low glare and light distribution, providing both homogeneous and accent lighting.

BRIDGELUX brand COB LED chip, Chromatic Rendering Index 90 (CRI) and optional 98 (CRI) BRIDGELUX brand supplied in color temperatures of 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K and adjustable 2700K~ 6000K.

Driver included with power factor 0.90 (PF).

Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Ceiling cut-outs: Ø75 mm.

Special Temperatures



Usage

Designed for general decorative and accent lighting which integrates into all types of modern spaces including both domestic and commercial environments, hotels, homes, office spaces and restaurants.

Colors

○ White

*Upon request it can be made available in any paint finish.

Versions

*Optional adjustment DALI, PWM, PUSH DIM, DIP SWITCH y TRIAC, CASAMBI, BLUETOOTH, ZIGBEE.

*Emergency kit LHKIT2460



LINK WALL WASHER

Reference	Consumption	Voltage	Temperature	Lumens	△	CRI	IP
ON-OFF							
LHDTW221522	15W	AC220-240V	2200K	960	WALL WASHER	90	44
LHDTW221527	15W	AC220-240V	2700K	960	WALL WASHER	90	44
LHDTW221530	15W	AC220-240V	3000K	960	WALL WASHER	90	44
LHDTW221540	15W	AC220-240V	4000K	960	WALL WASHER	90	44

*Optional chip in CRI95 in 3200K-3500K-5000K-6000K P.V.P: 90,00€

REGULATIONS

TRIAC

LHDTW221522T	15W	AC220-240V	2200K	960	WALL WASHER	90	44
LHDTW221527T	15W	AC220-240V	2700K	960	WALL WASHER	90	44
LHDTW221530T	15W	AC220-240V	3000K	960	WALL WASHER	90	44
LHDTW221540T	15W	AC220-240V	4000K	960	WALL WASHER	90	44

DALI

LHDTW221522D	15W	AC220-240V	2200K	960	WALL WASHER	90	44
LHDTW221527D	15W	AC220-240V	2700K	960	WALL WASHER	90	44
LHDTW221530D	15W	AC220-240V	3000K	960	WALL WASHER	90	44
LHDTW221540D	15W	AC220-240V	4000K	960	WALL WASHER	90	44

*Optional DALI+CCT. EX. REF. LHDT2215TNTD. Add 23,00€ to the P.V.P

BLUETOOTH

LHDTW221522B	15W	AC220-240V	2200K	960	WALL WASHER	90	44
LHDTW221527B	15W	AC220-240V	2700K	960	WALL WASHER	90	44
LHDTW221530B	15W	AC220-240V	3000K	960	WALL WASHER	90	44
LHDTW221540B	15W	AC220-240V	4000K	960	WALL WASHER	90	44

*Optional BLUETOOTH+CCT. EX. REF. LHDT2215TNTB. Add 23,00€ to the P.V.P

ZIGBEE

LHDTW221522Z	15W	AC220-240V	2200K	960	WALL WASHER	90	44
LHDTW221527Z	15W	AC220-240V	2700K	960	WALL WASHER	90	44
LHDTW221530Z	15W	AC220-240V	3000K	960	WALL WASHER	90	44
LHDTW221540Z	15W	AC220-240V	4000K	960	WALL WASHER	90	44

*Optional ZIGBEE+CCT. EX. REF. LHDT2215TNTZ. Add 23,00€ to the P.V.P

CASAMBI


LHDTW221522C	15W	AC220-240V	2200K	960	WALL WASHER	90	44
LHDTW221527C	15W	AC220-240V	2700K	960	WALL WASHER	90	44
LHDTW221530C	15W	AC220-240V	3000K	960	WALL WASHER	90	44
LHDTW221540C	15W	AC220-240V	4000K	960	WALL WASHER	90	44

*Optional EMERGENCY. ADD "E" EX. REF. LHDT221227E. Add 23,00€ to the P.V.P

ACCESSORIES

LHDTW221527C	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128
LHMBGATZGET	LUMINAIRES GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128
LHMBPTRIACZG	LUMINAIRES TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

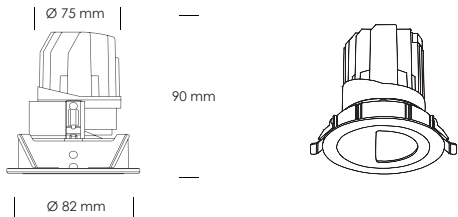

Luminous Flow

