

MAGNET 48V



MAGNET is a minimalist lighting system, both versatile and multi-purpose which provides multiple lighting solutions for offices, hotels, restaurants and also for all types of domestic and commercial environments.

Versions


- * optional adjustable BLUETOOTH.
- * optional DALI regulation.

The basis of the system are the 48v magnetic rails, which in its different versions; surface, recessed and suspended along with its various accessories, allows us to perform all kinds of desired lighting combinations such as illuminating in straight lines and/or via angles and integrating the light continuously and simultaneously along both the wall and the ceiling.

Color

- Black
- White



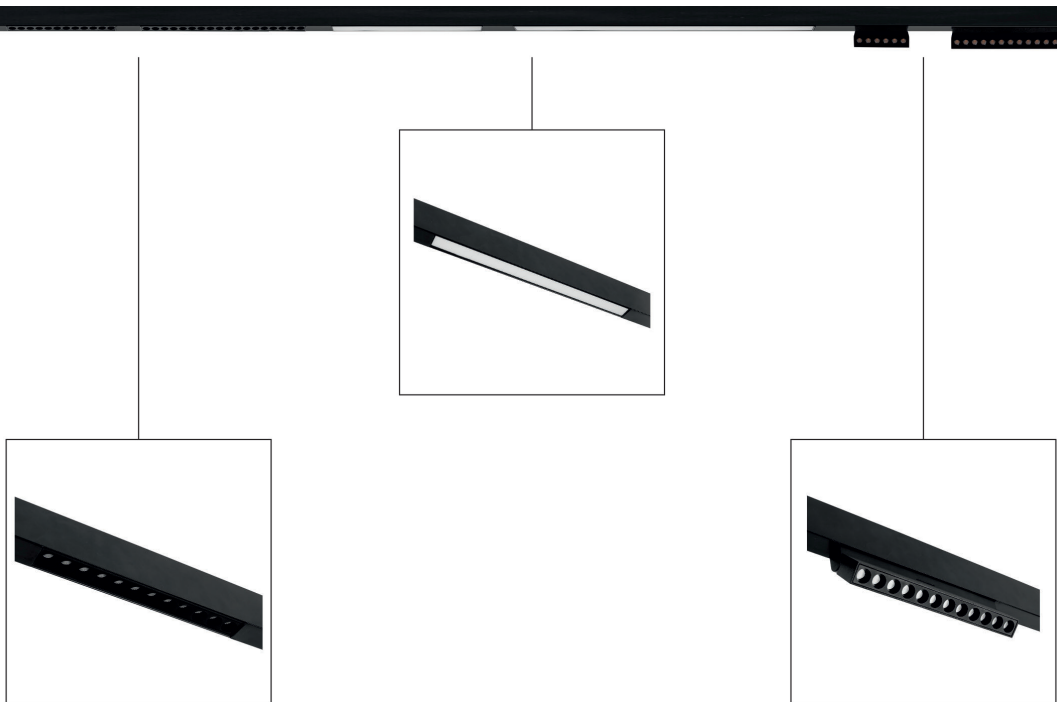

The luminaires adapt to the track simply by way of magnetization and without the use of tools for installation. This allows us to add and remove luminaires depending on the lighting needs, providing different possibilities for all types of ambient, decorative or accent lighting scenarios.

Special temperature



Available in up to four track installation options:

Conventional surface track

XS surface track

Conventional narrow and exposed flange recessed track

TRIMLESS recessed track

CASAMBI  Bluetooth™

OSRAM CREE 

Powered by
tuya
Intelligence
inside



MATRIX LINEAR XS

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHXMM1510N27	10W	DC48V	2700K	Black	660	36º	90	20
LHXMM1510B27	10W	DC48V	2700K	White	660	36º	90	20
LHXMM1515N27	15W	DC48V	2700K	Black	825	36º	90	20
LHXMM1515B27	15W	DC48V	2700K	White	825	36º	90	20
LHXMM1520N27	20W	DC48V	2700K	Black	1320	36º	90	20
LHXMM1520B27	20W	DC48V	2700K	White	1320	36º	90	20
LHXMM1510N30	10W	DC48V	3000K	Black	660	36º	90	20
LHXMM1510B30	10W	DC48V	3000K	White	660	36º	90	20
LHXMM1515N30	15W	DC48V	3000K	Black	825	36º	90	20
LHXMM1515B30	15W	DC48V	3000K	White	825	36º	90	20
LHXMM1520N30	20W	DC48V	3000K	Black	1320	36º	90	20
LHXMM1520B30	20W	DC48V	3000K	White	1320	36º	90	20
LHXMM1510N40	10W	DC48V	4000K	Black	660	36º	90	20
LHXMM1510B40	10W	DC48V	4000K	White	660	36º	90	20
LHXMM1515N40	15W	DC48V	4000K	Black	825	36º	90	20
LHXMM1515B40	15W	DC48V	4000K	White	825	36º	90	20
LHXMM1520N40	20W	DC48V	4000K	Black	1320	36º	90	20
LHXMM1520B40	20W	DC48V	4000K	White	1320	36º	90	20
BLUETOOTH - CCT								
LHXMM1510NTNB	10W	DC48V	2700K ~ 6000K	Black	660	36º	90	20
LHXMM1510BTNB	10W	DC48V	2700K ~ 6000K	White	660	36º	90	20
LHXMM1515NTNB	15W	DC48V	2700K ~ 6000K	Black	825	36º	90	20
LHXMM1515BTNB	15W	DC48V	2700K ~ 6000K	White	825	36º	90	20
LHXMM1520NTNB	20W	DC48V	2700K ~ 6000K	Black	1320	36º	90	20
LHXMM1520BTNB	20W	DC48V	2700K ~ 6000K	White	1320	36º	90	20

Dimensions

