

MATRIX RING 20

Reference	Consumption	Voltage	Temperature	Color	Lumens		CRI	IP
ON-OFF								
LHLRSI12030	20W	AC220-240V	3000K	Black	1650	48°	90	20
LHLRSI12040	20W	AC220-240V	4000K	Black	1650	48°	90	20

REGULATIONS

Reference	Temperature	Color
-----------	-------------	-------

TRIAC

LHLRSI12030T	3000K	Black
LHLRSI12040T	4000K	Black

DALI

LHLRSI12030D	3000K	Black
LHLRSI12040D	4000K	Black

BLUETOOTH

LHLRSI12030B	3000K	Black
LHLRSI12040B	4000K	Black

Reference	Temperature	Color
-----------	-------------	-------

0-10V

LHLRSI120300	3000K	Black
LHLRSI120400	4000K	Black

CASAMBI

LHLRSI12030C	3000K	Black
LHLRSI12040C	4000K	Black


ZIGBEE

LHLRSI12030Z	3000K	Black
LHLRSI12040Z	4000K	Black

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

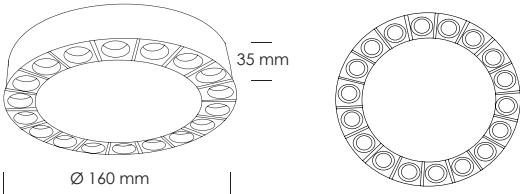

Luminous Flow

