

MATRIX RING 8

Reference	Consumption	Voltage	Temperature	Color	Lumens		CRI	IP
ON-OFF								
LHLRSI1830	8W	AC220-240V	3000K	Black-Black	760	48°	90	20
LHLRSI1840	8W	AC220-240V	4000K	Black-Black	760	48°	90	20


REGULATIONS

Reference	Temperature	Color	Reference	Temperature	Color
TRIAC					
LHLRSI1830T	3000K	Black	0-10V		
LHLRSI1840T	4000K	Black	LHLRSI18300	3000K	Black
			LHLRSI18400	4000K	Black
DALI					
LHLRSI1830D	3000K	Black	BLUETOOTH		
LHLRSI1840D	4000K	Black	LHLRSI1830B	3000K	Black
			LHLRSI1840B	4000K	Black
ZIGBEE					
LHLRSI1830Z	3000K	Black			
LHLRSI1840Z	4000K	Black			

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

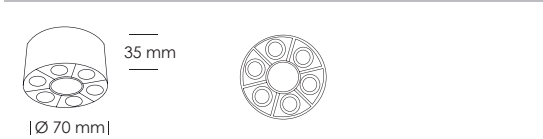

Luminous Flow

