

MATRIX SLIGHT 12

Reference	Consumption	Voltage	Temperature	Color	Lumens		CRI	IP
ON-OFF								
LHLRS0112B30	12W	AC220-240V	3000K	White	750	100°	90	20
LHLRS0112B40	12W	AC220-240V	4000K	White	750	100°	90	20
LHLRS0112N30	12W	AC220-240V	3000K	Black	750	100°	90	20
LHLRS0112N40	12W	AC220-240V	4000K	Black	750	100°	90	20

REGULATIONS

Reference	Temperature	Color
TRIAC		
LHLRS0112B30T	3000K	White
LHLRS0112B40T	4000K	White
LHLRS0112N30T	3000K	Black
LHLRS0112N40T	4000K	Black

DALI

LHLRS0112B30D	3000K	White
LHLRS0112B40D	4000K	White
LHLRS0112N30D	3000K	Black
LHLRS0112N40D	4000K	Black

BLUETOOTH

LHLRS0112B30B	3000K	White
LHLRS0112B40B	4000K	White
LHLRS0112N30B	3000K	Black
LHLRS0112N40B	4000K	Black

Reference	Temperature	Color
0-10V		
LHLRS0112B300	3000K	White
LHLRS0112B400	4000K	White
LHLRS0112N300	3000K	Black
LHLRS0112N400	4000K	Black

CASAMBI

LHLRS0112B30C	3000K	White
LHLRS0112B40C	4000K	White
LHLRS0112N30C	3000K	Black
LHLRS0112N40C	4000K	Black


ZIGBEE

LHLRS0112B30Z	3000K	White
LHLRS0112B40Z	4000K	White
LHLRS0112N30Z	3000K	Black
LHLRS0112N40Z	4000K	Black

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

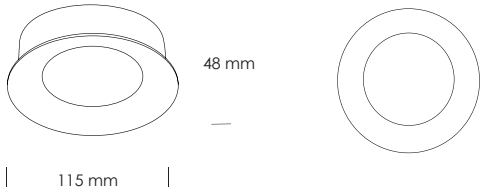

Luminous Flow

