

MATRIX SLIGHT 6

Reference	Consumption	Voltage	Temperature	Color	Lumens		CRI	IP
ON-OFF								
LHLRS016B30	6W	AC220-240V	3000K	White	430	100°	90	20
LHLRS016B40	6W	AC220-240V	4000K	White	430	100°	90	20
LHLRS016N30	6W	AC220-240V	3000K	Black	430	100°	90	20
LHLRS016N40	6W	AC220-240V	4000K	Black	430	100°	90	20

REGULATIONS

Reference	Temperature	Color
TRIAC		
LHLRS016B30T	3000K	White
LHLRS016B40T	4000K	White
LHLRS016N30T	3000K	Black
LHLRS016N40T	4000K	Black

DALI

LHLRS016B30D	3000K	White
LHLRS016B40D	4000K	White
LHLRS016N30D	3000K	Black
LHLRS016N40D	4000K	Black

ZIGBEE

LHLRS016B30Z	3000K	White
LHLRS016B40Z	4000K	White
LHLRS016N30Z	3000K	Black
LHLRS016N40Z	4000K	Black

Reference	Temperature	Color
0-10V		
LHLRS016B300	3000K	White
LHLRS016B400	4000K	White
LHLRS016N300	3000K	Black
LHLRS016N400	4000K	Black

BLUETOOTH

LHLRS016B30B	3000K	White
LHLRS016B40B	4000K	White
LHLRS016N30B	3000K	Black
LHLRS016N40B	4000K	Black


CASAMBI

LHLRS016B30C	3000K	White
LHLRS016B40C	4000K	White
LHLRS016N30C	3000K	Black
LHLRS016N40C	4000K	Black

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

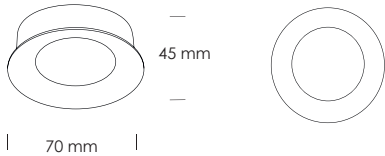

Luminous Flow

