

MATRIX XS



Description

Mini linear downlight of super reduced size and minimalist design, with high visual comfort and made up of individual optical modules.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Reflector manufactured in polycarbonate with gloss black and gloss white finish ensuring minimum glare.

24° aperture lens with UGR<9 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

OSRAM brand SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperature of 3000K.

Driver included with power factor 0.90(PF).

Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Temperature



Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

● White - Black ● Black - Black

Versions

*Optional adjustment , DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.




OSRAM **CASAMBI**  **Bluetooth**  **zigbee**

MATRIX XS 2

Reference	Consumption	Voltage	Temperature	Color	Lumens		CRI	IP
ON-OFF								
LHLXS12BN30	2W	AC220-240V	3000K	White-Black	200	24°	90	20
LHLXS12NN30	2W	AC220-240V	3000K	Black-Black	200	24°	90	20

Dimensions

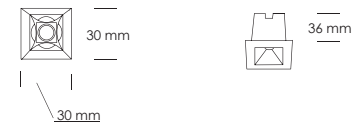

Luminous Flow

