


MATRIX XS SQUARE

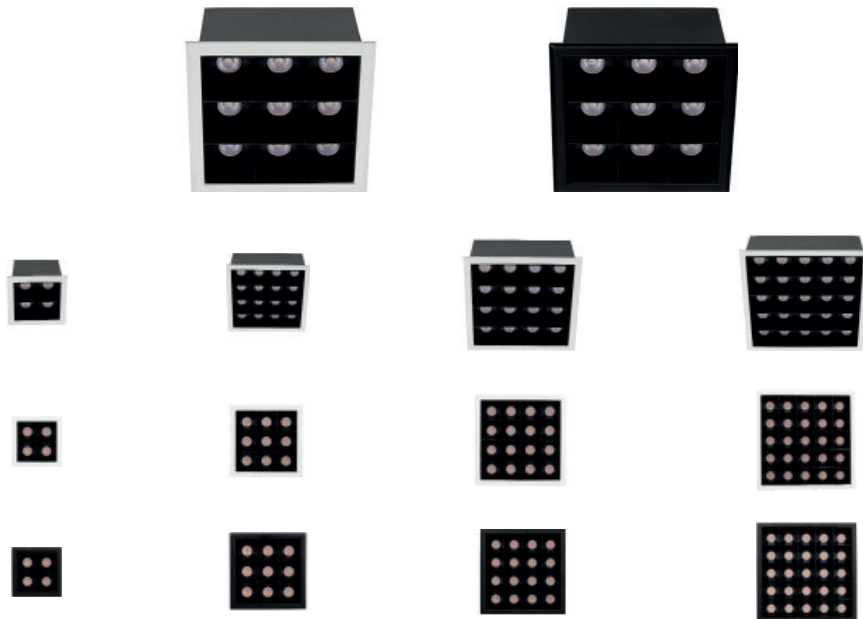

Description

Mini square downlight of super reduced size and minimalst design, with high visual comfort and made up of individual optical modules.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Reflector manufactured in polycarbonate with gloss black and gloss white finish ensuring minimum glare.

24° aperture lens with UGR<9 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

OSRAM brand SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperature of 3000K.

Driver included with power factor 0.90(PF).

Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Temperature

3000K

Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

● White - Black ● Black-Black

Versions

*Optional adjustment , DALI, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.




MATRIX XS SQUARE 10

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHMXS110BN30	10W	AC220-240V	3000K	White-Black	700	24°	90	20
LHMXS110NN30	10W	AC220-240V	3000K	Black-Black	700	24°	90	20
REGULATIONS								
TRIAC								
LHMXS110BN30T	10W	AC220-240V	3000K	White-Black	700	24°	90	20
LHMXS110NN30T	10W	AC220-240V	3000K	Black-Black	700	24°	90	20
0-10V								
LHMXS110BN300	10W	AC220-240V	3000K	White-Black	700	24°	90	20
LHMXS110NN300	10W	AC220-240V	3000K	Black-Black	700	24°	90	20
CASAMBI								
LHMXS110BN30C	10W	AC220-240V	3000K	White-Black	700	24°	90	20
LHMXS110NN30C	10W	AC220-240V	3000K	Black-Black	700	24°	90	20
DALI								
LHMXS110BN30D	10W	AC220-240V	3000K	White-Black	700	24°	90	20
LHMXS110NN30D	10W	AC220-240V	3000K	Black-Black	700	24°	90	20
BLUETOOTH								
LHMXS110BN30B	10W	AC220-240V	3000K	White-Black	700	24°	90	20
LHMXS110NN30B	10W	AC220-240V	3000K	Black-Black	700	24°	90	20
ZIGBEE								
LHMXS110BN30Z	10W	AC220-240V	3000K	White-Black	700	24°	90	20
LHMXS110NN30Z	10W	AC220-240V	3000K	Black-Black	700	24°	90	20

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZCET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

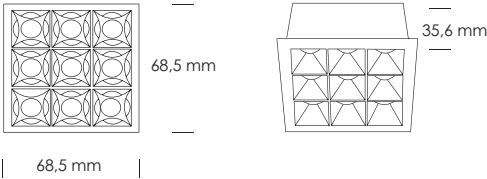

Luminous Flow

