


## MATRIX XS SURFACE

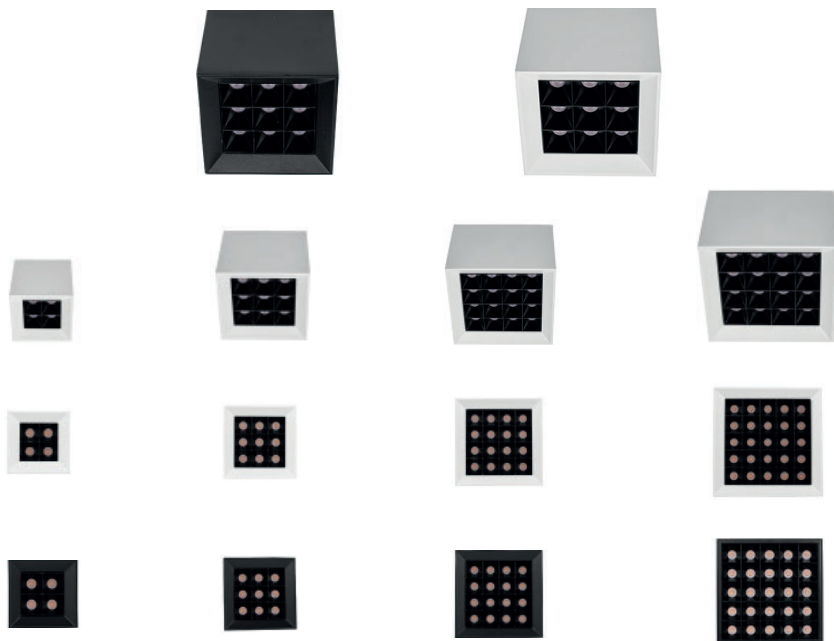

## Description

Mini surface downlight of super reduced size and minimalist design, with high visual comfort and made up of individual optical modules.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade.

Reflector manufactured in polycarbonate with matte black finish ensuring minimum glare. 24° aperture lens with UGR<9 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

OSRAM brand SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperature of 3000K.

Driver included with power factor 0.90(PF).

Voltage supply 220-240V / 50-60Hz.

Surface mounting.

## Temperature



## Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

## Colors


● White - Black ● Black - Black



MATRIX XS SURFACE 25

| Reference     | Consumption | Voltage    | Temperature | Color       | Lumens |  | CRI | IP |
|---------------|-------------|------------|-------------|-------------|--------|-----------------------------------------------------------------------------------|-----|----|
| <b>ON-OFF</b> |             |            |             |             |        |                                                                                   |     |    |
| LHMSXS125BN30 | 25W         | AC220-240V | 3000K       | White-Black | 1650   | 24°                                                                               | 90  | 20 |
| LHMSXS125NN30 | 25W         | AC220-240V | 3000K       | Black-Black | 1650   | 24°                                                                               | 90  | 20 |

Dimensions

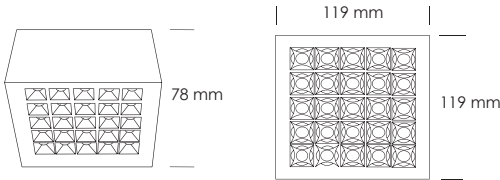

Luminous Flow

