


MATRIX XS SURFACE

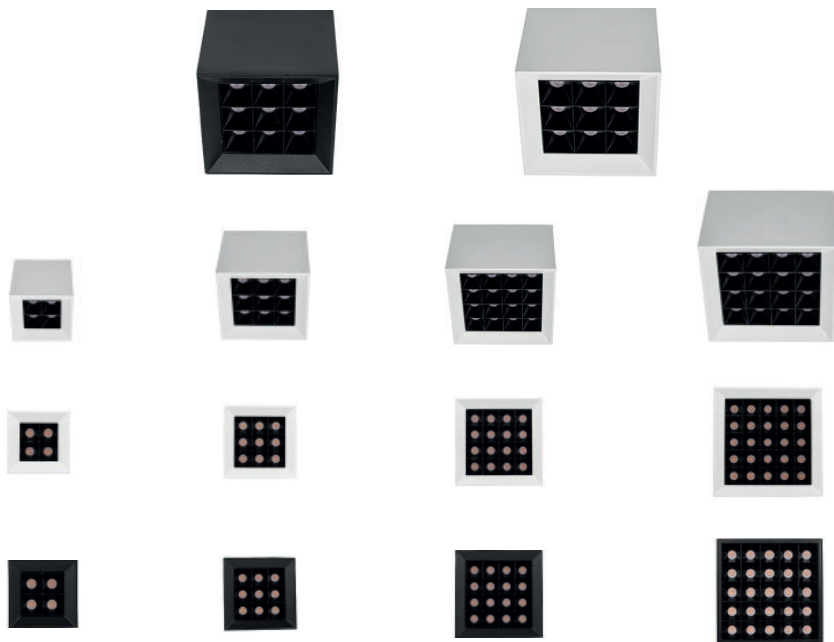

Description

Mini surface downlight of super reduced size and minimalist design, with high visual comfort and made up of individual optical modules.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade.

Reflector manufactured in polycarbonate with matte black finish ensuring minimum glare. 24° aperture lens with UGR<9 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

OSRAM brand SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperature of 3000K.

Driver included with power factor 0.90(PF).

Voltage supply 220-240V / 50-60Hz.

Surface mounting.

Temperature



Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors


● White - Black ● Black - Black



MATRIX XS SURFACE 5

Reference	Consumption	Voltage	Temperature	Color	Lumens	Δ _s	CRI	IP
ON-OFF								
LHMSXS15BN30	5W	AC220-240V	3000K	White-Black	360	24°	90	20
LHMSXS15NN30	5W	AC220-240V	3000K	Black-Black	360	24°	90	20

Dimensions

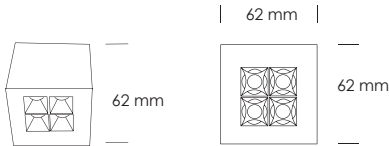

Luminous Flow

