

MICRO LINK



Orientable



Description

Adjustable, fixed and recessed mini downlight with 3W power.

Body and frame are made of cast aluminum, with high dissipation performance, which provides excellent heat evacuation.

IP20 protection grade.

Prismatic lenses with 24°, 36° and 55° apertures with low glare and symmetrical light distribution, providing perfect accent lighting.

BRIDGELUX brand COB LED chip with Color Rendering Index 90 (CRI) available in color temperatures of 2700K, 3000K and 4000K.

Driver included with power factor 0.90 (PF).

Voltage supply 220-240V/50-60Hz.

Assembly includes all types of displays, false ceilings, furniture pieces, and showcases.

Ceiling cut-outs: Ø30mm and Ø40mm.

Temperatures



Usage

Designed for decorative accent lighting. Especially practical for furniture lighting and commercial display cases.

Colors

○ White ● Black ● Grey ● Gold

*Upon request it can be made available in any paint finish.

Versions

*Optional adjustment DALI, TRIAC, 0-10V, ZIGBEE, BLUETOOTH Y CASAMBI.



MICRO LINK ADJUSTABLE

Reference	Consumption	Voltage	Temperature	Color	Lumen	△	CRI	IP
ON-OFF								
LHDTO223B27	3W	AC220-240V	2700K	White	225	36°	90	20
LHDTO223B30	3W	AC220-240V	3000K	White	225	36°	90	20
LHDTO223B40	3W	AC220-240V	4000K	White	225	36°	90	20
LHDTO223N27	3W	AC220-240V	2700K	Black	225	36°	90	20
LHDTO223N30	3W	AC220-240V	3000K	Black	225	36°	90	20
LHDTO223N40	3W	AC220-240V	4000K	Black	225	36°	90	20
LHDTO223G27	3W	AC220-240V	2700K	Grey	225	36°	90	20
LHDTO223G30	3W	AC220-240V	3000K	Grey	225	36°	90	20
LHDTO223G40	3W	AC220-240V	4000K	Grey	225	36°	90	20
LHDTO223O27	3W	AC220-240V	2700K	Gold	225	36°	90	20
LHDTO223O30	3W	AC220-240V	3000K	Gold	225	36°	90	20
LHDTO223O40	3W	AC220-240V	4000K	Gold	225	36°	90	20

REGULATIONS

0-10V

VERSION 0-10V WHITE FINISH ADD "0" TO THE REFERENCE-EXAMPLE: LHDTF223B300

VERSION 0-10V BLACK - GREY - GOLD FINISH ADD "0" O THE REFERENCE-EXAMPLE: LHDTF223O300

TRIAC

VERSION TRIAC WHITE FINISH ADD "T" TO THE REFERENCE-EXAMPLE: LHDTF223B30T

VERSION TRIAC BLACK - GREY - GOLD FINISH ADD "T" TO THE REFERENCE-EXAMPLE: LHDTF223O30T

DALI

VERSION DALI WHITE FINISH ADD "D" TO THE REFERENCE-EXAMPLE: LHDTF223B30D

VERSION DALI BLACK - GREY - GOLD FINISH ADD "D" TO THE REFERENCE-EXAMPLE: LHDTF223O30D

BLUETOOTH

VERSION BLUETOOTH WHITE FINISH ADD "B" TO THE REFERENCE-EXAMPLE: LHDTF223B30B

VERSION BLUETOOTH BLACK - GREY - GOLD FINISH ADD "B" A LA REFERENCIA-EXAMPLE: LHDTF223O30B

ZIGBEE

VERSION ZIGBEE WHITE FINISH ADD "Z" TO THE REFERENCE-EXAMPLE: LHDTF223B30Z

VERSION ZIGBEE BLACK - GREY - GOLD FINISH ADD "Z" TO THE REFERENCE-EXAMPLE: LHDTF223O30Z

CASAMBI


VERSION CASAMBI WHITE FINISH ADD "C" TO THE REFERENCE-EXAMPLE: LHDTF223B30C

VERSION CASAMBI BLACK - GREY - GOLD FINISH ADD "C" TO THE REFERENCE-EXAMPLE: LHDTF223O30C

ACCESSORIES

LHDTO223L2	INTERCHANGEABLE 24 DEGREE OPTICAL
LHDTO223L55	INTERCHANGEABLE 55 DEGREE OPTICAL
LHCN4PIN	MICROLINK/LINK MAX CONNECTOR STRIP, 4 LUMINAIRES FOR QUICK CONNECTION
LHCNCABLE	CABLE CONNECTOR STRIP 2 MTS FOR QUICK CONNECTION IN SERIES
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX, 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX, 128 LUMINAIRES
LHMBPTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

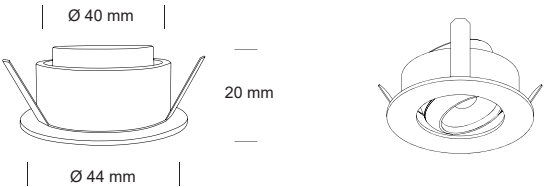

Luminous Flow

