


MINI LINK



Description

Mini recessed downlight with high visual comfort available in 8W wattage.

Body and frame made of cast aluminum, with high dissipation performance, allowing for excellent heat evacuation.

IP65 protection grade.

Prismatic lenses of 20°, 30° for 5w mini link and 15°, 24°, 36° and 50° for 8w mini link with low glare and symmetrical light distribution, which provides perfect accent lighting.

BRIDGELUX brand COB LED chip with Color Rendering Index 90 (CRI) that is supplied in color temperatures of 2700K, 3000K and 4000K.

Driver included with power factor 0.90 (PF).

Voltage supply 220-240V / 50-60Hz.

Assembly includes all types of false ceilings, furniture, showcases and displays.

Ceiling cut-outs: Ø30mm and Ø36mm.

Temperature



Usage

Designed for general decorative and accent lighting which integrates into all types of modern spaces including both domestic and commercial environments, hotels, homes, office spaces and restaurants.

Colors

○ White ● Black ● Grey ● Gold

*Upon request it can be made available in any paint finish.

Versions

*Optional adjustment DALI, TRIAC, 0-10V, ZIGBEE, BLUETOOTH Y CASAMBI



MINI LINK 8

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHDT228B27	8W	AC220-240V	2700K	White	520	40°	90	65
LHDT228B30	8W	AC220-240V	3000K	White	520	40°	90	65
LHDT228B40	8W	AC220-240V	4000K	White	520	40°	90	65
LHDT228N27	8W	AC220-240V	2700K	Black	520	40°	90	65
LHDT228N30	8W	AC220-240V	3000K	Black	520	40°	90	65
LHDT228N40	8W	AC220-240V	4000K	Black	520	40°	90	65
LHDT228G27	8W	AC220-240V	2700K	Grey	520	40°	90	65
LHDT228G30	8W	AC220-240V	3000K	Grey	520	40°	90	65
LHDT228G40	8W	AC220-240V	4000K	Grey	520	40°	90	65
LHDT228O27	8W	AC220-240V	2700K	Gold	520	40°	90	65
LHDT228O30	8W	AC220-240V	3000K	Gold	520	40°	90	65
LHDT228O40	8W	AC220-240V	4000K	Gold	520	40°	90	65

*Optional chip in CRI95 in 3200K-3500K-5000K-6000K Add P.V.P: 14,00€

REGULATIONS

0-10V

VERSION 0-10V WHITE FINISH ADD "0" TO THE REFERENCE-EXAMPLE: . LHDT228B300

VERSION 0-10V BLACK - GREY - GOLD FINISH ADD "0" O THE REFERENCE-EXAMPLE: LHDT228O300

TRIAC

VERSION TRIAC WHITE FINISH ADD "T" TO THE REFERENCE-EXAMPLE: . LHDT228B30T

VERSION TRIAC BLACK - GREY - GOLD FINISH ADD "T" TO THE REFERENCE-EXAMPLE: . LHDT228O30T

DALI

VERSION DALI WHITE FINISH ADD "D" TO THE REFERENCE-EXAMPLE: . LHDT228B30D

VERSION DALI BLACK - GREY - GOLD FINISH ADD "D" TO THE REFERENCE-EXAMPLE: . LHDT228O30D

BLUETOOTH

VERSION BLUETOOTH WHITE FINISH ADD "B" TO THE REFERENCE-EXAMPLE: . LHDT228B30B

VERSION BLUETOOTH BLACK - GREY - GOLD FINISH ADD "B" A LA REFERENCIA-EXAMPLE: . LHDT228O30B

ZIGBEE

VERSION ZIGBEE WHITE FINISH ADD "Z" TO THE REFERENCE-EXAMPLE: . LHDT228B30Z

VERSION ZIGBEE BLACK - GREY - GOLD FINISH ADD "Z" TO THE REFERENCE-EXAMPLE: . LHDT228O30Z

CASAMBI


VERSION CASAMBI WHITE FINISH ADD "C" TO THE REFERENCE-EXAMPLE: . LHDT228B30C

VERSION CASAMBI BLACK - GREY - GOLD FINISH ADD "C" TO THE REFERENCE-EXAMPLE: LHDT228O30C

ACCESSORIES

LHDT228L15	INTERCHANGEABLE 15 DEGREE OPTICAL
LHDT228L24	INTERCHANGEABLE 24 DEGREE OPTICAL
LHDT228L36	INTERCHANGEABLE 36 DEGREE OPTICAL
LHDT228L50	INTERCHANGEABLE 50 DEGREE OPTICAL
LHCN4PIN	MICROLINK/LINK MAX CONNECTOR STRIP. 4 LUMINAIRES FOR QUICK CONNECTION
LHCNCABLE	CABLE CONNECTOR STRIP 2 MTS FOR QUICK CONNECTION IN SERIES
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

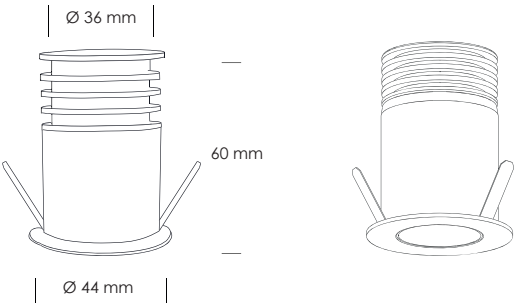

Luminous Flow

