

# ONYX TILTING



## Description

Recessed, linear downlight with a high level of visual comfort formed by individual 20W optical modules with a super-small longitudinal design.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade.

Reflector made of polycarbonate and different decorative finishes guaranteeing minimum glare.

38° aperture lens with UGR<12 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperatures of 2700K, 3200K and 4000K.

Driver included with power factor 0.90(PF).

Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

## Temperature

2700K

3200K

4000K

## Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

## Colors

Black - White

White - Black

White - White

Transparent

Black - black

White - Gold

Black - Gold

## Versions

\* Optional adjustment, Dali, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.



ONYX 20 TILTING

| Reference     | Consumption | Voltage    | Temperature         | Color | Lumens | △   | CRI | IP | P.V.P  |
|---------------|-------------|------------|---------------------|-------|--------|-----|-----|----|--------|
| <b>ON-OFF</b> |             |            |                     |       |        |     |     |    |        |
| LHOLE120BCCT  | 20W         | AC220-240V | 2700K ~3200K~ 4000K | White | 1510   | 38° | 90  | 20 | 82,00€ |
| LHOLE120NCCT  | 20W         | AC220-240V | 2700K ~3200K~ 4000K | Black | 1510   | 38° | 90  | 20 | 82,00€ |

REGULATIONS

TRIAC

| Reference     | Temperature         | Color |
|---------------|---------------------|-------|
| LHOLE120BCCTT | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTT | 2700K ~3200K~ 4000K | Black |

DALI

| Reference     | Temperature         | Color |
|---------------|---------------------|-------|
| LHOLE120BCCTD | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTD | 2700K ~3200K~ 4000K | Black |

BLUETOOTH

| Reference     | Temperature         | Color |
|---------------|---------------------|-------|
| LHOLE120BCCTB | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTB | 2700K ~3200K~ 4000K | Black |

ZIGBEE

| Reference     | Temperature         | Color |
|---------------|---------------------|-------|
| LHOLE120BCCTZ | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTZ | 2700K ~3200K~ 4000K | Black |

CASAMBI

| Reference     | Temperature         | Color |
|---------------|---------------------|-------|
| LHOLE120BCCTC | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTC | 2700K ~3200K~ 4000K | Black |

0-10V

| Reference     | Temperature         | Color |
|---------------|---------------------|-------|
| LHOLE120BCCT0 | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCT0 | 2700K ~3200K~ 4000K | Black |

DALI + CCT

| Reference       | Temperature         | Color |
|-----------------|---------------------|-------|
| LHOLE120BCCTTND | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTTND | 2700K ~3200K~ 4000K | Black |

BLUETOOTH + CCT

| Reference       | Temperature         | Color |
|-----------------|---------------------|-------|
| LHOLE120BCCTTNB | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTTNB | 2700K ~3200K~ 4000K | Black |

ZIGBEE + CCT

| Reference       | Temperature         | Color |
|-----------------|---------------------|-------|
| LHOLE120BCCTTNZ | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTTNZ | 2700K ~3200K~ 4000K | Black |


CASAMBI + CCT

| Reference       | Temperature         | Color |
|-----------------|---------------------|-------|
| LHOLE120BCCTTNC | 2700K ~3200K~ 4000K | White |
| LHOLE120NCCTTNC | 2700K ~3200K~ 4000K | Black |

ACCESSORIES

|             |                                        |               |
|-------------|----------------------------------------|---------------|
| LHROLR120BB | Reflector round onyx linear 12 points  | White - White |
| LHROLR120BN | Reflector round onyx linear 12 points  | White - Black |
| LHROLR120BO | Reflector round onyx linear 12 points  | White - Gold  |
| LHROLR120NN | Reflector round onyx linear 12 points  | Black - Black |
| LHROLR120NO | Reflector round onyx linear 12 points  | Black - Gold  |
| LHROLC120B  | Reflector square onyx linear 12 points | White         |
| LHROLC120N  | Reflector square onyx linear 12 points | Black         |
| LHROLC120T  | Reflector square onyx linear 12 points | Transparent   |

Dimensions

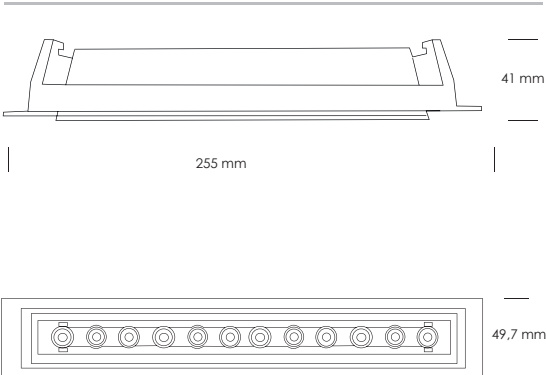

Luminous Flow

