


ONYX TRIMLESS

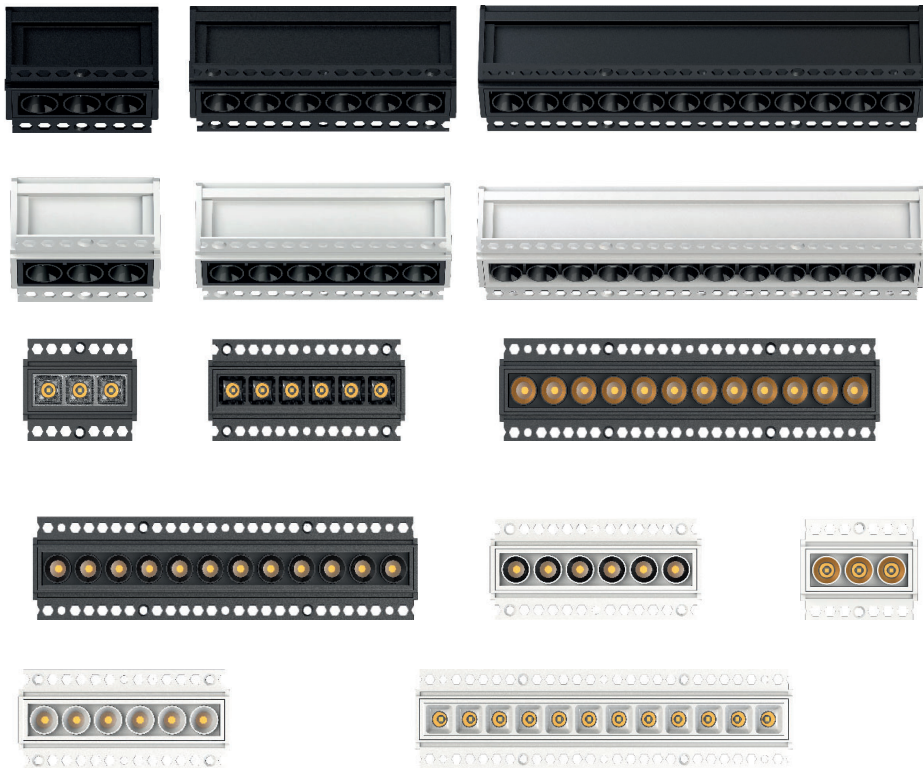

Description

Recessed, linear downlight in trimless version, flush to the ceiling and frameless, formed by individual 10W optical modules with a super-small longitudinal design. This makes it a perfect choice because of its minimalism and high level of visual comfort.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Reflector made of polycarbonate and different decorative finishes guaranteeing minimum glare.


38° aperture lens with UGR<12 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperatures of 2700K, 3200K and 4000K.

Driver included with power factor 0.90(PF).
Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Temperature



UGR<12

OSRAM

CASAMBI

Bluetooth

zigbee

Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

- Black - White
- White - White
- Black - Black
- Black - Gold
- White - Black
- Transparent
- White - Gold

Versions

* Optional adjustment, Dali, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.



ONYX 10 TRIMLESS

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHOLT110BCCT	10W	AC220-240V	2700K ~3200K~ 4000K	White	750	38°	90	20
LHOLT110NCCT	10W	AC220-240V	2700K ~3200K~ 4000K	Black	750	38°	90	20

REGULATIONS

TRIAC

Reference	Temperature	Color
LHOLT110BCCTT	2700K ~3200K~ 4000K	White
LHOLT110NCCTT	2700K ~3200K~ 4000K	Black

DALI

Reference	Temperature	Color
LHOLT110BCCTD	2700K ~3200K~ 4000K	White
LHOLT110NCCTD	2700K ~3200K~ 4000K	Black

BLUETOOTH

Reference	Temperature	Color
LHOLT110BCCTB	2700K ~3200K~ 4000K	White
LHOLT110NCCTB	2700K ~3200K~ 4000K	Black

ZIGBEE

Reference	Temperature	Color
LHOLT110BCCTZ	2700K ~3200K~ 4000K	White
LHOLT110NCCTZ	2700K ~3200K~ 4000K	Black

CASAMBI

Reference	Temperature	Color
LHOLT110BCCTC	2700K ~3200K~ 4000K	White
LHOLT110NCCTC	2700K ~3200K~ 4000K	Black

0-10V

Reference	Temperature	Color
LHOLT110BCCT0	2700K ~3200K~ 4000K	White
LHOLT110NCCT0	2700K ~3200K~ 4000K	Black

DALI + CCT

Reference	Temperature	Color
LHOLT110BCCTTND	2700K ~3200K~ 4000K	White
LHOLT110NCCTTND	2700K ~3200K~ 4000K	Black

BLUETOOTH + CCT

Reference	Temperature	Color
LHOLT110BCCTTNB	2700K ~3200K~ 4000K	White
LHOLT110NCCTTNB	2700K ~3200K~ 4000K	Black

ZIGBEE + CCT

Reference	Temperature	Color
LHOLT110BCCTTNZ	2700K ~3200K~ 4000K	White
LHOLT110NCCTTNZ	2700K ~3200K~ 4000K	Black


CASAMBI + CCT

Reference	Temperature	Color
LHOLT110BCCTTNC	2700K ~3200K~ 4000K	White
LHOLT110NCCTTNC	2700K ~3200K~ 4000K	Black

ACCESSORIES

LHROLR110BB	Reflector round onyx linear 6 points	White - White
LHROLR110BN	Reflector round onyx linear 6 points	White - Black
LHROLR110BO	Reflector round onyx linear 6 points	White - gold
LHROLR110NN	Reflector round onyx linear 6 points	Black - black
LHROLR110NO	Reflector round onyx linear 6 points	Black - Gold
LHROLC110B	Reflector square onyx linear 6 points	White
LHROLC110N	Reflector square onyx linear 6 points	Black
LHROLC110T	Reflector square onyx linear 6 points	Transparent

Dimensions

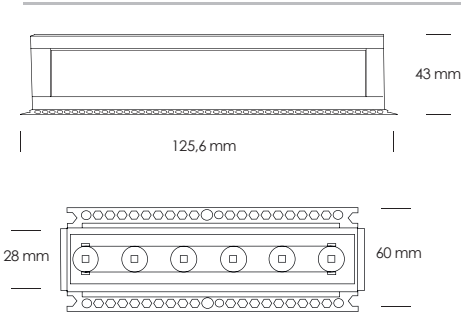

Luminous Flow

