


ONYX TRIMLESS

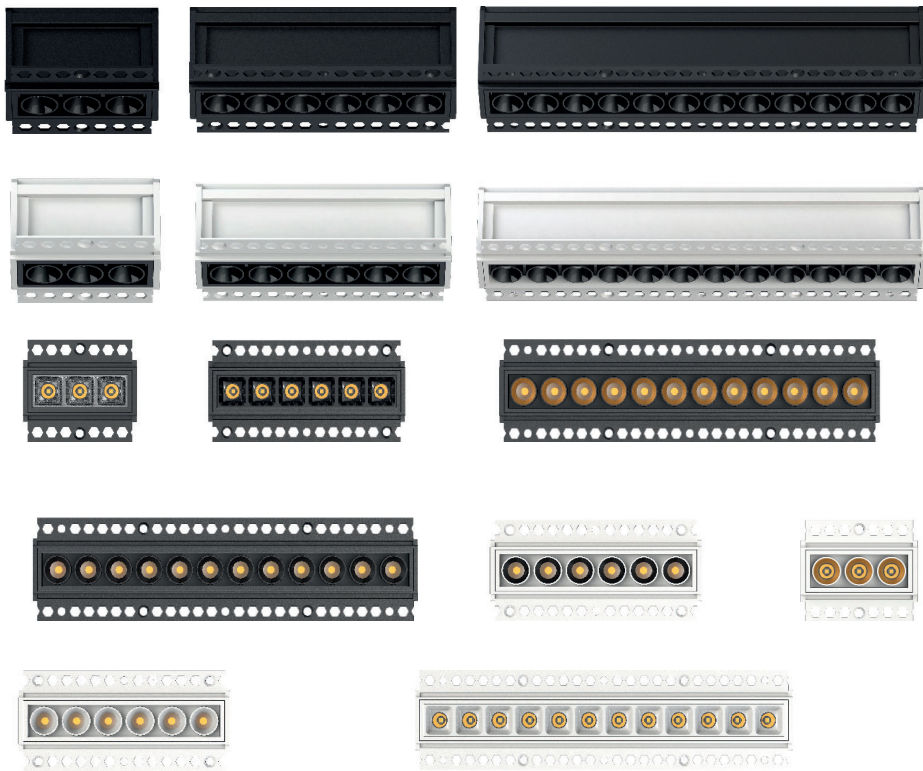

Description

Recessed, linear downlight in trimless version, flush to the ceiling and frameless, formed by individual 6W optical modules with a super-small longitudinal design. This makes it a perfect choice because of its minimalism and high level of visual comfort.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Reflector made of polycarbonate and different decorative finishes guaranteeing minimum glare.

38° aperture lens with UGR<12 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperatures of 2700K, 3200K and 4000K.

Driver included with power factor 0.90(PF).
Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Temperature



OSRAM

CASAMBI



Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

- Black - White
- White - Black
- White - White
- Transparent
- Black - Black
- White - Gold
- Black - Gold

Versions

* Optional adjustment, Dali, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.



ONYX 6 TRIMLESS

Reference	Consumption	Voltage	Temperature	Color	Lumens	Δ	CRI	IP
ON-OFF								
LHOLT16BCCT	6W	AC220-240V	2700K ~3200K~ 4000K	White	375	38°	90	20
LHOLT16NCCT	6W	AC220-240V	2700K ~3200K~ 4000K	Black	375	38°	90	20

REGULATIONS

TRIAC

Reference	Temperature	Color
LHOLT16BCCTT	2700K ~3200K~ 4000K	White
LHOLT16NCCTT	2700K ~3200K~ 4000K	Black

DALI

Reference	Temperature	Color
LHOLT16BCCTD	2700K ~3200K~ 4000K	White
LHOLT16NCCTD	2700K ~3200K~ 4000K	Black

BLUETOOTH

Reference	Temperature	Color
LHOLT16BCCTTB	2700K ~3200K~ 4000K	White
LHOLT16NCCTTB	2700K ~3200K~ 4000K	Black

ZIGBEE

Reference	Temperature	Color
LHOLT16BCCTTZ	2700K ~3200K~ 4000K	White
LHOLT16NCCTTZ	2700K ~3200K~ 4000K	Black

CASAMBI

Reference	Temperature	Color
LHOLT16BCCTC	2700K ~3200K~ 4000K	White
LHOLT16NCCTC	2700K ~3200K~ 4000K	Black

0-10V

Reference	Temperature	Color
LHOLT16BCCTO	2700K ~3200K~ 4000K	White
LHOLT16NCCTO	2700K ~3200K~ 4000K	Black

DALI + CCT

Reference	Temperature	Color
LHOLT16BCCTTND	2700K ~3200K~ 4000K	White
LHOLT16NCCTTND	2700K ~3200K~ 4000K	Black

BLUETOOTH + CCT

Reference	Temperature	Color
LHOLT16BCCTTNB	2700K ~3200K~ 4000K	White
LHOLT16NCCTTNB	2700K ~3200K~ 4000K	Black

ZIGBEE + CCT

Reference	Temperature	Color
LHOLT16BCCTTNZ	2700K ~3200K~ 4000K	White
LHOLT16NCCTTNZ	2700K ~3200K~ 4000K	Black


CASAMBI + CCT

Reference	Temperature	Color
LHOLT16BCCTTNC	2700K ~3200K~ 4000K	White
LHOLT16NCCTTNC	2700K ~3200K~ 4000K	Black

ACCESSORIES

LHROLR16BB	Reflector round onyx linear 3 points	White - White
LHROLR16BN	Reflector round onyx linear 3 points	White - Black
LHROLR16BO	Reflector round onyx linear 3 points	White - Gold
LHROLR16NN	Reflector round onyx linear 3 points	Black - Black
LHROLR16NO	Reflector round onyx linear 3 points	Black - Gold
LHROLC16B	Reflector square onyx linear 3 points	White
LHROLC16N	Reflector square onyx linear 3 points	Black
LHROLC16T	Reflector square onyx linear 3 points	Transparent

Dimensions



Luminous Flow

