

ONYX WALL WASHER



Description

Recessed, wallwasher downlight with a high level of visual comfort formed by individual 20W optical modules with a super-small longitudinal design.

Body made of die-cast aluminum with high dissipation performance that provides excellent heat evacuation.

IP20 protection grade

Low glare lens with symmetrical light distribution and that provides a homogeneous illumination over the entire surface.

Optical wallwasher with UGR<12 low glare and symmetrical light distribution, providing homogeneous illumination over the entire surface.

SMD Led Chip with Color Rendering Index 90 (CRI) available in color temperatures of 2700K, 3200K and 4000K.

Driver included with power factor 0.90(PF). Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Usage

Designed for general and accent lighting applications that integrates into all types of modern, domestic, hotel, commercial, restaurant, office and residential spaces.

Colors

- Black - Transparent
- White - Transparent

Versions

* Optional adjustment, Dali, 0-10V, PWM, PUSH DIM, DIP SWITCH, TRIAC, CASAMBI, BLUETOOTH Y ZIGBEE.

Temperature



ONYX 20 WALL WASHER

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
-----------	-------------	---------	-------------	-------	--------	---	-----	----

ON-OFF

LHOLW120BCCT	20W	AC220-240V	2700K ~3200K~ 4000K	White	1510	Wall Washer	90	20
LHOLW120NCCT	20W	AC220-240V	2700K ~3200K~ 4000K	Black	1510	Wall Washer	90	20

REGULATIONS

TRIAC

Reference	Temperature	Color	P.V.P
LHOLW120BCCTT	2700K ~3200K~ 4000K	White	105,00€
LHOLW120NCCTT	2700K ~3200K~ 4000K	Black	105,00€

DALI

Reference	Temperature	Color	P.V.P
LHOLW120BCCTD	2700K ~3200K~ 4000K	White	107,00€
LHOLW120NCCTD	2700K ~3200K~ 4000K	Black	107,00€

BLUETOOTH

Reference	Temperature	Color	P.V.P
LHOLW120BCCTB	2700K ~3200K~ 4000K	White	109,00€
LHOLW120NCCTB	2700K ~3200K~ 4000K	Black	109,00€

ZIGBEE

Reference	Temperature	Color	P.V.P
LHOLW120BCCTZ	2700K ~3200K~ 4000K	White	116,00€
LHOLW120NCCTZ	2700K ~3200K~ 4000K	Black	116,00€

CASAMBI

Reference	Temperature	Color	P.V.P
LHOLW120BCCTC	2700K ~3200K~ 4000K	White	116,00€
LHOLW120NCCTC	2700K ~3200K~ 4000K	Black	116,00€

0-10V

Reference	Temperature	Color	P.V.P
LHOLW120BCCT0	2700K ~3200K~ 4000K	White	
LHOLW120NCCT0	2700K ~3200K~ 4000K	Black	

DALI + CCT

Reference	Temperature	Color	P.V.P
LHOLW120BCCTTND	2700K ~3200K~ 4000K	White	
LHOLW120NCCTTND	2700K ~3200K~ 4000K	Black	

BLUETOOTH + CCT

Reference	Temperature	Color	P.V.P
LHOLW120BCCTTNB	2700K ~3200K~ 4000K	White	
LHOLW120NCCTTNB	2700K ~3200K~ 4000K	Black	


ZIGBEE + CCT

Reference	Temperature	Color	P.V.P
LHOLW120BCCTTNZ	2700K ~3200K~ 4000K	White	
LHOLW120NCCTTNZ	2700K ~3200K~ 4000K	Black	

CASAMBI + CCT

Reference	Temperature	Color	P.V.P
LHOLW120BCCTTNC	2700K ~3200K~ 4000K	White	
LHOLW120NCCTTNC	2700K ~3200K~ 4000K	Black	

Dimensions

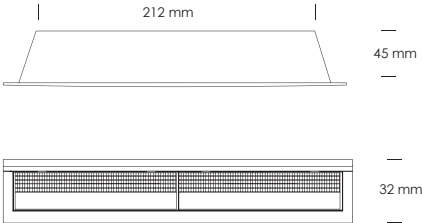

Luminous Flow

