

PLANET 40

Reference	Consumption	Voltage	Temperature	Lumens	△	CRI	IP
ON-OFF							
LHDR540B22	40W	AC220-240V	2200K	4170	40°	95	20
LHDR540B27	40W	AC220-240V	2700K	4170	40°	95	20
LHDR540B30	40W	AC220-240V	3000K	4170	40°	95	20
LHDR540B35	40W	AC220-240V	3500K	4170	40°	95	20
LHDR540B40	40W	AC220-240V	4000K	4170	40°	95	20
LHDR540B50	40W	AC220-240V	5000K	4170	40°	95	20
LHDR540B60	40W	AC220-240V	6000K	4170	40°	95	20
LHDR540BME	40W	AC220-240V	MEAT	2590	40°	87	20
LHDR540BVE	40W	AC220-240V	VEGETABLE	3150	40°	95	20
LHDR540BWE	40W	AC220-240V	FISH	2200	40°	75	20
LHDR540BBR	40W	AC220-240V	BREAD	3150	40°	95	20

*Available in black

REGULATIONS

Reference	Temperature
TRIAC	
LHDR540B22T - 27T	2200K - 2700K
LHDR540B35T - 50T - 60T	3500K - 5000K
LHDR540B30T - 40T	3000K - 4000K
LHDR540BMET - VET - WET - BRT	FOOD

DALI

LHDR540B22D - 27D	2200K - 2700K
LHDR540B35D - 50D - 60D	3500K - 5000K
LHDR540B30D - 40D	3000K - 4000K
LHDR540BMED - VED - WED - BRD	FOOD

*Optional DALI+CCCT. EX. REF. LHDR540BTD.

ZIGBEE

LHDR540B22Z - 27Z	2200K - 2700K
LHDR540B35Z - 50Z - 60Z	3500K - 5000K
LHDR540B30Z - 40Z	3000K - 4000K
LHDR540BMEZ - VEZ - WEZ - BRZ	FOOD

*Optional DALI+CCCT. EX. REF. LHDR540BTNZ.

Reference	Temperature
0-10V	
LHDR540B220 - 270	2200K - 2700K
LHDR540B350 - 500 - 600	3500K - 5000K
LHDR540B300 - 400	3000K - 4000K
LHDR540BME0 - VE0 - WE0 - BR0	FOOD

CASAMBI

LHDR540B22C - 27C	2200K - 2700K
LHDR540B35C - 50C - 60C	3500K - 5000K
LHDR540B30C - 40C	3000K - 4000K
LHDR540BMEC - VEC - WEC - BRC	FOOD

BLUETOOTH

LHDR540B22B - 27B	2200K - 2700K
LHDR540B35B - 50B - 60B	3500K - 5000K
LHDR540B30B - 40B	3000K - 4000K
LHDR540BMEB - VEB - WEB - BRB	FOOD

*Optional BLUETOOTH+CCCT. EX. REF. LHDR540BTNB.

*Optional EMERGENCY regulation by adding "E" to the end of the. LHDR530B30E


OPTICS

LHDR54012	12 DEGREE OPTICS
LHDR54030	30 DEGREE OPTICS

ACCESSORIES

LHPTC181224	TRIAC TO CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES
LHMBPTRIACZG	TRIAC CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W.

Dimensions

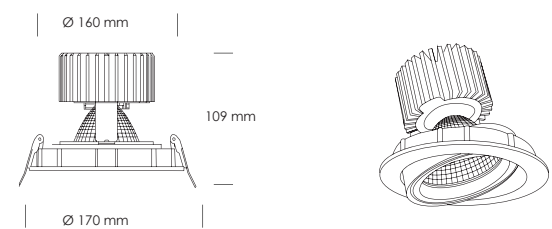

Luminous Flow

