

ZOE



Description

Round recessed 15W downlight providing high visual comfort.

Body made of die-cast aluminum with high dissipation performance providing excellent heat dissipation.

IP54 protection grade.

High performing and low luminance 15°, 38°, 36° y 60° specular lens with low glare UGR<19 and symmetrical light distribution, providing homogeneous or accent lighting as required.

BRIDGELUX brand COB LED chip with Color Rendering Index 95 (CRI) that is supplied in color temperatures of 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K and adjustable 2700K~ 6000K.


LIFUD driver included with power factor 0.95 (PF).

Voltage supply 220-240V / 50-60Hz.

Mounting in false ceilings adaptable to all types of modular and plaster ceilings.

Ceiling cut-out: Ø60 mm.

Special temperature



Usage

Designed for general lighting applications for both domestic and commercial use due to its efficient consumption and visual comfort.

Colors

○ White ● Black

*Upon request it can be made available in any paint finish.

Versions

*Optional adjustment DALI TRIAC y CASAMBI, BLUETOOTH Y ZIGBEE.

*Emergency kit LHKIT2460 see information on page 415.



ZOE 15

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHDTZ2215B22	15W	AC220-240V	2200K	White	1425	36°	95	54
LHDTZ2215B27	15W	AC220-240V	2700K	White	1425	36°	95	54
LHDTZ2215B30	15W	AC220-240V	3000K	White	1425	36°	95	54
LHDTZ2215B40	15W	AC220-240V	4000K	White	1425	36°	95	54
LHDTZ2215N22	15W	AC220-240V	2200K	Black	1425	36°	95	54
LHDTZ2215N27	15W	AC220-240V	2700K	Black	1425	36°	95	54
LHDTZ2215N30	15W	AC220-240V	3000K	Black	1425	36°	95	54
LHDTZ2215N40	15W	AC220-240V	4000K	Black	1425	36°	95	54

*Optional chip in CRI95 in 3200K-3500K - 5000K - 6000K

REGULATIONS

Reference	Temperature	Color	Reference	Temperature	Color
TRIAC					
LHDTZ2215B22T - 27T	2200K - 2700K	White	LHDTZ2215B220 - 270	2200K - 2700K	White
LHDTZ2215B30T	3000K	White	LHDTZ2215B300	3000K	White
LHDTZ2215B40T	4000K	White	LHDTZ2215B400	4000K	White
LHDTZ2215N22T - 27T	2200K - 2700K	Black	LHDTZ2215N220 - 270	2200K - 2700K	Black
LHDTZ2215N30T	3000K	Black	LHDTZ2215N300	3000K	Black
LHDTZ2215N40T	4000K	Black	LHDTZ2215N400	4000K	Black

*Optional TRIAC in temperatures 3200K-3500K - 5000K - 6000K DALI

LHDTZ2215B22D - 27D	2200K - 2700K	White
LHDTZ2215B30D	3000K	White
LHDTZ2215B40D	4000K	White
LHDTZ2215N22D - 27D	2200K - 2700K	Black
LHDTZ2215N30D	3000K	Black
LHDTZ2215N40D	4000K	Black

*Optional DALI in temperatures 3200K-3500K - 5000K - 6000K

*Optional DALI+CCT. EX. REF. LHDTZ2215NTND.

CASAMBI

LHDTZ2215B22C - 27C	2200K - 2700K	White
LHDTZ2215B30C	3000K	White
LHDTZ2215B40C	4000K	White
LHDTZ2215N22C - 27C	2200K - 2700K	Black
LHDTZ2215N30C	3000K	Black
LHDTZ2215N40C	4000K	Black

*Optional CASAMBI in temperatures 3200K-3500K - 5000K - *Optional ZIGBEE in temp. 3200K-3500K - 5000K - 6000K

ZIGBEE


LHDTZ2215B22Z - 27Z	2200K - 2700K	White
LHDTZ2215B30Z	3000K	White
LHDTZ2215B40Z	4000K	White
LHDTZ2215N22Z - 27Z	2200K - 2700K	Black
LHDTZ2215N30Z	3000K	Black
LHDTZ2215N40Z	4000K	Black

*Optional ZIGBEE+CCT. EX. REF. LHDTZ2215N22NTNZ.

ACCESSORIES

LHDTZ2215OP15	LENS ANGLE 15°
LHDTZ2215OP38	LENS ANGLE 38°
LHDTZ2215OP60	LENS ANGLE 60°
LHPTC181224	TRIAC to CASAMBI SIGNAL CONVERTER PICKUP MAXIMUM 150W
LHMBGATZBBL	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + BLUETOOTH 5.0 MAX. 128 LUMINAIRES
LHMBGATZGET	GATEWAY UNIVERSAL REMOTE ZIGBEE 3.0 + ETHERNET MAX. 128 LUMINAIRES TRIAC
LHMBPTTRIACZG	CONVERTER DRIVER - ZIGBEE 3.0 + PUSH MAX 150W

Dimensions

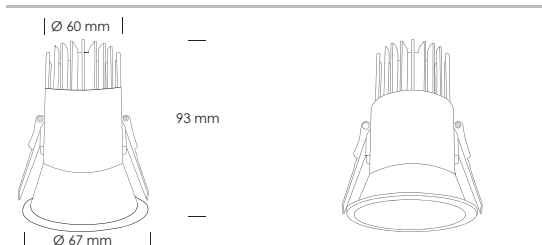

Luminous Flow

