


CRONOS



Description

Linear track projector with three phase adapter, in 40W power, ideal for lighting all kinds of commercial spaces.

Body made of cast aluminum, with high dissipation performance that provides excellent heat dissipation.

IP20 protection grade.

Opal diffuser made of polycarbonate, 100° opening angle with low glare and symmetrical light distribution, which together with its high performance provides homogeneous illumination.

Led chip SMD brand EPISTAR with Color Rendering Index 80 (CRI) that is supplied in color temperatures of 3000K and 4000K.

Built-in LIFUD driver with 0.95 power factor (PF).

Supply voltage 230V / 50-60Hz.

Mounting on a three-phase rail using a universal rail adapter.

Usage

Designed for general lighting applications in premises with great heights and all kinds of spaces for commercial use, supermarkets, department stores and dealerships.

Colors

☐ White ☒ Black

Versions

*Not adjustable.


Temperature



CRONOS 40

Reference	Consumption	Voltage	Temperature	Color	Lumens	△	CRI	IP
ON-OFF								
LHLN1640B27	40W	AC220-240V	2700K	White	3600	100°	80	20
LHLN1640B30	40W	AC220-240V	3000K	White	3600	100°	80	20
LHLN1640B40	40W	AC220-240V	4000K	White	3600	100°	80	20
LHLN1640N27	40W	AC220-240V	2700K	Black	3600	100°	80	20
LHLN1640N30	40W	AC220-240V	3000K	Black	3600	100°	80	20
LHLN1640N40	40W	AC220-240V	4000K	Black	3600	100°	80	20

Dimensions

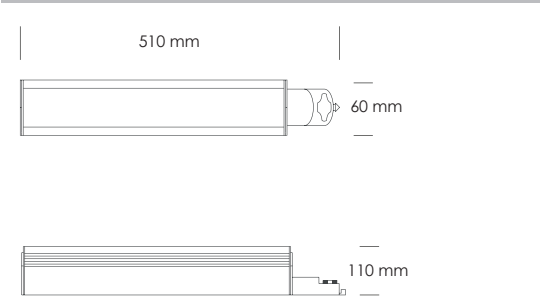

Luminous Flow

