

TOKIO



Description

Linear track projector with three-phase adapter, in 50W power and high visual comfort, made up of individual 5W optical modules with a longitudinal design, ideal for commercial spaces, restaurants and hotels.

Body made of cast aluminum, with high dissipation performance that provides excellent heat dissipation. IP20 protection grade.

Reflector manufactured in gloss polycarbonate and diffuser in gloss black polycarbonate ensuring minimum glare.

Individual 45° aperture optics with low glare UGR<12.

Symmetrical light distribution, which provides homogeneous or accent lighting depending on the needs.

BRIDGELUX brand COB Led chip with Color Rendering Index 80 (CRI) that is supplied in color temperatures of 3000K and 4000K.

Built-in LiFUD driver with 0.95 power factor (PF).

Supply voltage 230V / 50-60Hz.

Mounting on a three-phase rail using a universal rail adapter.

Usage

Designed for accent lighting applications for all types of spaces for commercial use, supermarkets, department stores and dealerships.

Colors

○ White ● Black

Versions

*Not adjustable.


Temperature



TOKIO 50

Reference	Consumption	Voltage	Temperature	Color	Lumens		CRI	IP
ON-OFF								
LHLS1650N27	50W	AC220-240V	2700K	Black	4000	45°	90	20
LHLS1650B27	50W	AC220-240V	2700K	White	4000	45°	90	20
LHLS1650N30	50W	AC220-240V	3000K	Black	4000	45°	90	20
LHLS1650B30	50W	AC220-240V	3000K	White	4000	45°	90	20
LHLS1650N40	50W	AC220-240V	4000K	Black	4000	45°	90	20
LHLS1650B40	50W	AC220-240V	4000K	White	4000	45°	90	20

Dimensions

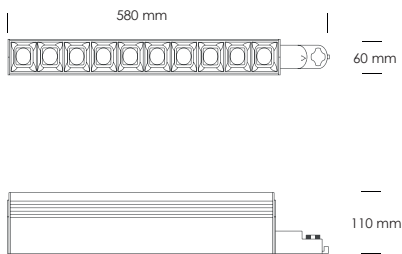

Luminous Flow

